c UL US LISTED

SINCE 2000

PROFESSIONAL FITTING & CONDUIT MANUFACTURER



QUALITY
BENEFIT SHARING
COMMON DEVELOPMENTT

Changzhou Yinlei Electronic Co.,Ltd.
Yinlei Electric (Thailand) Co.,Ltd.


常州市银磊有限公司
YINLEI ELECTRONIC



Company Introduction

Changzhou Yinlei Electronic Co., Ltd. was established in 2000 and is located in Changzhou city, Jiangsu province near to Shanghai with area of 25,000 square meters and two hundred staffs. We established a new factory in Thailand in 2021. We are the powerful professional manufacturer on electronic products for over 20 years. Our main market is North America, South America, Middle East Countries, Asia.

Our main products are conduit bodies, weatherproof box, EMT & RIGID & Flex fittings, Flexible conduits and so on. We are fitted with kinds of advanced equipment, auto - packing ma-chines, auto - assembling machines, powder coating lines, horizontal cold die casting ma-chines, stamping machines, chamfering machines, etc. All products are produced in - house to make sure the quality is to be controlled well. ERP system has been set up to manage all processes for years.

UL laboratory fit with professional devices ensures our products complying with UL Standard for both testing and inspection. R & D team with experts and technicians has great ability keep-ing on innovation and new designs.

Changzhou Yinlei is committed to quality, benefit sharing, common development. We are serving our customers with excellent quality products, beneficial prices and experienced service.

Honorary Certificate





Company Culture

Innovation: Every day,our scientists,engineers and technicians are involved in the develop ment of new products and systems, as well as of innovative manufacturing processes. Their work is also devoted to the continuous improvement of existing products.

Value: Our goal is to fully satisfy our customers expectations through the quality of our products and services.

Social responsibilty: Social commitment is an essential principle underlying the corporate policy guidelines of YINLEI ELECTRONIC.

Sincere service

We regard service as important as quality forever. With increasing maturity of product quality, service will be our another important marketing technique.

Timely and fast delivery

Quality

Quality and Quality improvement is every associates responsibility and ultimate goal, from the board of directors to apprentices.Quality means doing the detail from the beginning, thus preventing failures in the end.Continuous improvements of the quality of processes lowers costs and increases productivity,It is the policy of YINLEI ELECTRONIC to provide products and services, which lead to complete customer satisfaction. It is our continuar aim to improve and UPDATE our quality systems.

We recognise that the continued success of our company is dependent on the delivery of quality products at competitive prices.

We ensure that all employees at each stage of production and administration take the responsi bility of guaranteeing the level of service provided equals or exceeds customer requirements.

QC Procedure

Ensure high-quality products















UL Laboratory



E315256	E356513	E508470
E315257	E365588	E523902
E315258	E365589	E539948
E315280	E358603	E540069
E315281	E360998	E540070
E331642	E494921	



Thailand Factory









Production Equipment











TABLE OF CONTENTS

WEATHERPROOF BOX/COVER


Weatherproof Box·····1-6


Weatherproof Box Extension Adaptersrs·····7-8


Weatherproof Box Gasket·····9-10


Weatherproof Box Mount Cover·····11-16

LAMPHOLDER


Lampholders·····17-18

CONDUIT BODIES


Conduit Bodies·····19-25


Conduit Bodies Gasket·····26


Air Disconnect·····27

EMT & RIGID


Emt Fittings·····28-31


Raintight Fittings·····32-33


Pull Elbows·····34-37


Emt Conduit & Elbow·····38


Emt & Rigid Strap·····39-44


Rigid Connectors·····45-54


Rigid & Imc Elbows·····55-56


Rigid Nipple & Close·····57-58

BOX SUPPORT


Pigtail·····59


Adjustable Plaster Ring·····60-62


Steel Box·····63-64


Box Support·····65-70

UIQUIDTIGHT


Liquid Tight Connectors·····70-74


Air Whips·····74


Liquid-Tight Conduit·····75

FLEX& NM & SE


Flex Connectors·····76-79


Galvanized Steel & Aluminum Flexible Conduit·····80


Cable Connectors·····81-82


Plastic Bushings·····83-84


Seu Strap·····85


Wedge Clamp·····86


Nail Plate·····87


Reducing Washers·····88


Service Entrance Connector·····89-90


Grounding·····91-92



WEATHERPROOF BOX/COVER

Weatherproof Box·····1-6


Weatherproof Box Extension Adaptersrs····7-8

Weatherproof Box Gasket·····9-10

Weatherproof Box Mount Cover·····11-16

WEATHERPROOF BOXES - SINGLE GANG(3 HOLES) - ALUMINUM






APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65031	1/2"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65032	3/4"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65033	1"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028

WEATHERPROOF BOXES - SINGLE GANG(4 HOLES) - ALUMINUM






APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65041	1/2"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65042	3/4"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028

WEATHERPROOF BOXES - SINGLE GANG(5 HOLES) - ALUMINUM





APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65051	1/2"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65052	3/4"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028

SINGLE GANG WEATHERPROOF BOX OUTLETS(5 HOLES SIDE OPENING) - ALUMINUM





APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998


CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65051X	1/2"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65052X	3/4"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028
65053X	1"	GRAY/WHITE/BRONZE	-	50	4.606	2.815	2.028

SINGLE GANG DEEP WEATHERPROOF BOX OUTLETS(3 HOLES) - ALUMINUM

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65031D	1/2"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65032D	3/4"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65033D	1"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626






SINGLE GANG DEEP WEATHERPROOF BOX OUTLETS(4 HOLES) - ALUMINUM

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65041D	1/2"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65042D	3/4"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626






SINGLE GANC DEEP WEATHERPROOF BOX OUTLETS(5 HOLES) - ALUMINUM

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65051D	1/2"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65052D	3/4"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626






SINGLE GANG DEEP WEATHERPROOF BOX OUTLETS(5 HOLES SIDE OPENING) - ALUMINUM

c UL us
E360998


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65051DX	1/2"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65052DX	3/4"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626
65053DX	1"	GRAY/WHITE/BRONZE	-	25	4.606	2.815	2.626





WEATHERPROOF BOXES-DOUBLE GANG(3 HOLES) - ALUMINUM

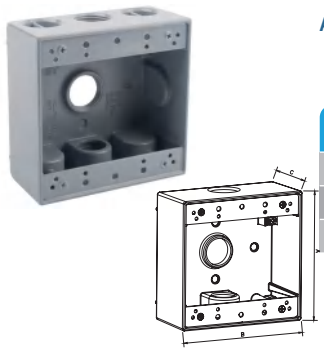


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65131	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65132	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65133	1"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

WEATHERPROOF BOXES-DOUBLE GANG (4 HOLES) - ALUMINUM

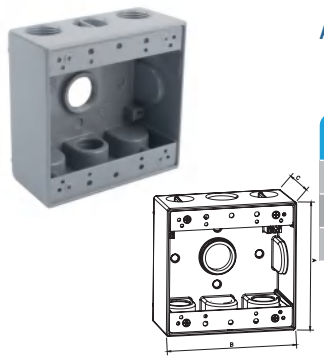


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65141	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65142	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65143	1"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

WEATHERPROOF BOXES-DOUBLE GANG(5 HOLES) - ALUMINUM

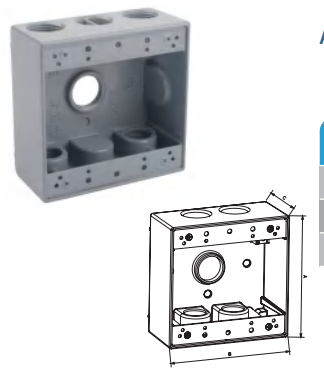


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65151	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65152	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65153	1"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

TWO GANG WEATHERPROOF BOX OUTLETS(5 HOLES SIDE OPENING) - ALUMINUM

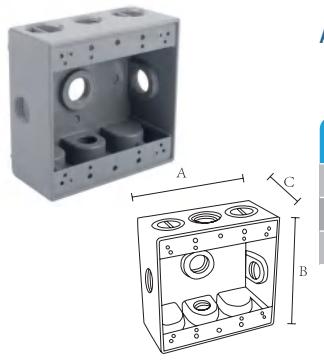

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998


CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65151X	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65152X	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65153X	1"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

TWO GANG DEEP WEATHERPROOF BOX OUTLETS(5 HOLES) - ALUMINUM

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65151D	1/2"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697
65152D	3/4"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697
65153D	1"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697

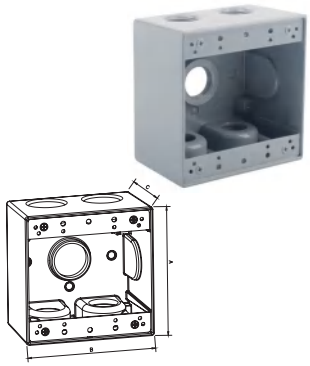


TWO GANG DEEP WEATHERPROOF BOX OUTLETS(7 HOLES SIDE OPENING) - ALUMINUM

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65171DX	1/2"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697
65172DX	3/4"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697
65173DX	1"	GRAY/WHITE/BRONZE	-	15	4.528	4.528	2.697

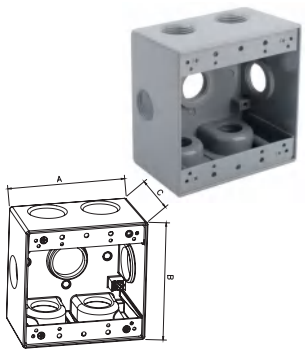


TWO GANG WEATHERPROOF BOX OUTLETS(6 HOLES) - ALUMINUN

c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65161	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65162	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

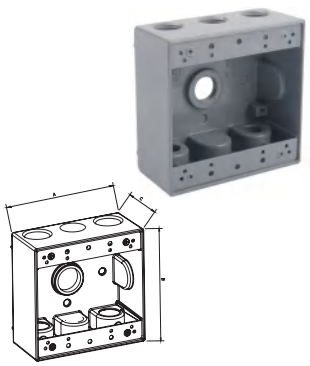


TWO GANG WEATHERPROOF BOX OUTLETS(6 HOLES SIDE OPENING) - ALUMINUM


c UL us
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65161X	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65162X	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098



TWO GANG WEATHERPROOF BOX OUTLETS(7 HOLES)-ALUMINUM

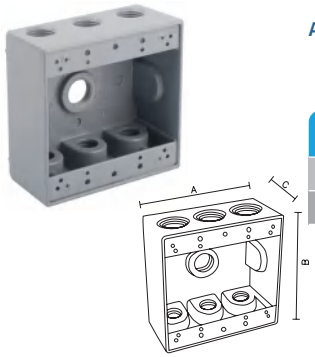


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65171	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65172	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

TWO GANG WEATHERPROOF BOX OUTLETS(7 HOLES SIDE OPENING) - ALUMINUM

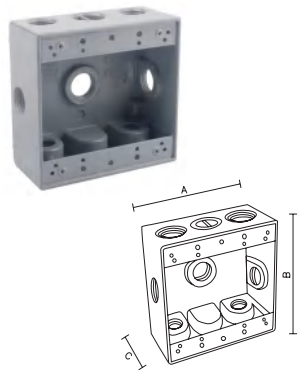


APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65171X	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65172X	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

TWO GANG WEATHERPROOF BOX OUTLETS(9 HOLES SIDE OPENING) - ALUMINUM




APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65191X	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098
65192X	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.098

THREE GANG DEEP WEATHERPROOF BOX OUTLETS(7 HOLES) - ALUMINUM



APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

c UL us
E360998


CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65271D	1/2"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.697
65272D	3/4"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.697
65273D	1"	GRAY/WHITE/BRONZE	-	30	4.539	4.579	2.697

WEATHERPROOF BOXES-DOUBLE GANG(4" ROUND BOX)-ALUMINUM

c UL US
E360998

APPLICATION: May be used as a weatherproof junction box or for wall of outdoor outlets/switches in wet, damp or dry locations.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
65241	1/2"	GRAY/WHITE/BRONZE	-	50	5.551	1.630
65242	3/4"	GRAY/WHITE/BRONZE	-	50	5.551	1.630

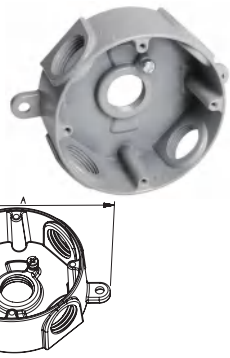

WEATHERPROOF BOXES-DOUBLE GANG(4" ROUND EXTENSION) - ALUMINUM

c UL US
E360998

APPLICATION: Used to provide additional capacity for box fill requirements.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
65261	1/2"	GRAY/WHITE/BRONZE	-	25	4.122	1.630
65262	3/4"	GRAY/WHITE/BRONZE	-	25	4.122	1.630




METAL CLOSURE PLUGS - ZINC DIE CAST

c UL US
E358603

APPLICATION: For use with weatherproof boxes, covers and kits.

CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
82051	1/2"	GRAY/WHITE/BRONZE	-	1000	0.819	0.287
82052	3/4"	GRAY/WHITE/BRONZE	-	1000	1.020	0.295
82053	1"	GRAY/WHITE/BRONZE	-	500	1.295	0.346






PLASTIC CLOSURE PLUGS

c UL US
E358603

APPLICATION: For use with weatherproof boxes, covers and kits.


CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
39001	1/2"	GRAY/WHITE/BRONZE	-	1000	0.827	0.299
39002	3/4"	GRAY/WHITE/BRONZE	-	1000	1.043	0.299
39003	1"	GRAY/WHITE/BRONZE	-	500	1.291	0.339





SINGLE - GANG - EXTENSION ADAPTERS-5 - 1/4" X3 - 1/2" X1 - 1/2" DEEP TWO THREADED OUTLETS - ALUMINUM






APPLICATION: Used to provide additional capacity for box fill requirements.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65321	1/2"	-	40	4.559	2.850	1.339
65322	3/4"	-	40	4.559	2.850	1.339

SINGLE - GANG - EXTENSION ADAPTERS-5 - 1/4" X3 - 1/2" X1 - 1 /2" DEEP FOUR THREADED OUTLETS - ALUMINUM






APPLICATION: Used to provide additional capacity for box fill requirements.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65341	1/2"	-	40	4.559	2.850	1.339
65342	3/4"	-	40	4.559	2.850	1.339

SINGLE - GANG - EXTENSION ADAPTERS-5 - 1/4" X3-1/2" X1-1/2" DEEP SIX THREADED OUTLETS -A LUMINUM





APPLICATION: Used to provide additional capacity for box fill requirements.

c UL us
E360998


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65361	1/2"	-	40	4.559	2.850	1.339
65361-1	3/4"	-	40	4.559	2.850	1.339

SWING - ARM - EXTENSION ADAPTERS - 3 - 1/2"X5-1/4"X1 - 1/2" DEEP - TWO THREADED OUTLETS - ALUMINUM

c UL us
E360998

APPLICATION: Used to provide additional capacity for box fill requirements.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65421	1/2"	-	24	5.248	3.500	1.504
65421-1	3/4"	-	24	5.248	3.500	1.504

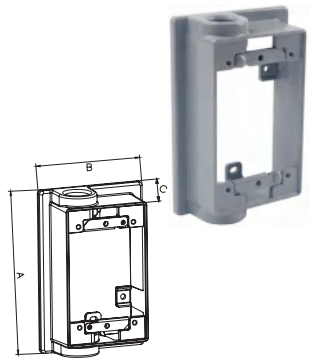



SWING - ARM - EXTENSION ADAPTERS - 3 - 1/2"X5 - 1/4"X1 - 1/2" DEEP - SIX THREADED OUTLETS - ALUMINUM

c UL us
E360998

APPLICATION: Used to provide additional capacity for box fill requirements.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65461	1/2"	-	40	5.248	3.504	1.890
65461-1	3/4"	-	40	5.248	3.504	1.890






SINGLE - GANG - EXTENSION - 4 - 1/2" X2 - 3/4" X1" DEEP - ALUMINUM

c UL us
E360998

APPLICATION: Used to provide additional capacity for box fill requirements.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65511	-	-	50	4.705	2.933	1.024






TWO - GANG EXTENSION - 4 - 1/2" X4 - 9/16" X1" DEEP - ALUMINUM

c UL us
E360998

APPLICATION: Used to provide additional capacity for box fill requirements.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
65521	-	-	50	4.587	4.665	1.004





WEATHERPROOF SINGLE GANG DEVICE MOUNT COVER - BLANK - ALUMINUM/STEEL






APPLICATION: For use with rectangular boxes.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76201	-	-	100	4.736	2.953

TWO GANG WEATHERPROOF DEVICE MOUNT COVER BLANK - ALUMINUM/STEEL






APPLICATION: For use with rectangular boxes.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76221	-	-	50	4.657	4.657

THREE GANG WEATHERPROOF BOX MOUNT COVER BLANK-ALUMINUM/STEEL






APPLICATION: For use with rectangular boxes.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76331	-	-	100	6.524	4.646

4" ROUND CEILING CLOSURE PLATE-ALUMINUM/STEEL






APPLICATION: For use with 4" round boxes.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
76101	Screw & universal mount strap	-	50	4.173
76102	(2) 8 - 32 screws, direct mount to fixture outlet box	-	50	4.173
76103	Fixture stud & universal mount strap	-	50	4.173

ROUND COVER - 3 HOLES - ALUMINUM/ZINC





APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.


c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
65933	1/2"	-	50	4.134

ONE GANG GASKET

APPLICATION: For use with weatherproof boxes, covers and kits.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
69001	-	-	200	4.620	2.930






TWO GANG GASKET

APPLICATION: For use with weatherproof boxes, covers and kits.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
69002	-	-	200	4.610	4.610






ROUND GASKET

APPLICATION: For use with weatherproof boxes, covers and kits.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
69003	-	-	200	4.210





ROUND GASKET

APPLICATION: For use with lampholder.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
69004	-	-	200	2.421	0.331



Mounting Tabs

APPLICATION: For fix the weatherproof boxes.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
69005	-	-	200	2.421	0.331



LAMPHOLDER GASKET


APPLICATION: For use with 4" round boxes.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
69006	-	-	200	2.421	0.331





ONE GANG COVER GFCI HORIZONTAL INCLUDE GASKET, SCREWS - ZINC




APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65822-GH	-	-	30	4.560	2.830

ONE GANG COVER GFCI - VERTICAL INCLUDE GASKET, SCREWS - ZINC




APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65829-GV	-	-	30	4.560	2.830

ONE GANG COVER DUPLEX/COMB, DEVICE - HORIZONTAL INCLUDE GASKET, SCREWS - ZINC




APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65821-DH	-	-	30	4.560	2.830

TWO GANG COVER TWO DUPLEX INCLUDE GASKET, SCREW - ZINC




APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65836-2D	-	-	30	4.500	4.530

TWO GANG COVER TWO GFCI INCLUDE GASKET, SCREWS - ZINC



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65837-2G	-	-	30	4.530	4.530

RAYNTITE SINGLE GANG WEATHERPROOF COVER DUPLEX - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65611-DH	-	-	30



RAYNTITE TWO GANG WEATHERPROOF COVER - (1)1.406" DIAMETER & (1)GFCI - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-GS	-	-	30



RAYNTITE TWO GANG WEATHERPROOF COVER - (1)TOGGLE & (1)GFCI - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-TG	-	-	30



RAYNTITE TWO GANG WEATHERPROOF COVER - (2)1.406" DIAMETER - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-20A	-	-	30



RAYNTITE TWO GANG WEATHERPROOF COVER - (1)2.156" DIAMETER - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-40A	-	-	50



RAYNTITE TWO GANG WEATHERPROOF COVER - (1)2.625" DIAMETER - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-50A	-	-	50

c UL us
E360998

RAYNTITE TWO GANG WEATNERPROOF COVER - (2)GFCI - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65621-2G	-	-	50

c UL us
E360998

TWO GANG COVER TWO DUPLEX INCLUDE GASKET, SCREW - ZINC





APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65721-S	Cover only	-	50
65721-2S	(2) SP 125V, 10A	-	50

c UL us
E360998

THREE GANG BOX WEATHERPROOF MOUNT COVER(3)SINGLE POLE SWITCHES - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65731-3S	(3) SP 125V, 10A	-	50

c UL us
E360998

SINGLE GANG WEATHERPROOF SWITCH COVER - ALUMINUM

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65711-S	SP 125V, 10A	-	50
65811-S	3-Way 125V, 6A or 250V, 3A	-	50
65812-S	SP 120-277VAC, 20A	-	50
65813-S	DP 120-277VAC, 20A	-	50



WEATHERPROOF SINGLE GANG BOX MOUNT COVER 1.406" DIAMETER - ALUMINUM

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-20A	Single, 1.406* diameter	-	50



SINGLE GANG WEATHERPROOF COVER - HORIZONTAL 1.406" DIAMETER - ALUMINUM

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-H20A	Single, 1.406* diameter	-	50



TWO GANG WEATHERPROOF DEVICE MOUNT COVER DUPLEX & SWITCH - ALUMINUM

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65921-DS	(1) SP 125V,10A &(1) Duplex receptacle	-	50



WEATHERPROOF SINGLE GANG BOX MOUNT COVER - BLANK - ALUMINUM

APPLICATION: For use with rectangular boxes.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
76301	-	-	50



WEATHERPROOF SINGLE GANG VERTICAL DEVICE MOUNT COVER DUPLEX - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-VD	Duplex	-	50

SINGLE GANG WEATHERPROOF COVER-MOTOR PLUG BASE-ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911	Motor plug base. 1.600" diameter 125V, 15A wiring device included	-	50

WEATHERPROOF SINGLE GANG VERTICAL DEVICE MOUNT COVER 1.406" DIAMETER - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-V20A	Duplex	-	50

SINGLE GANG WEATHERPROOF COVER - HORIZONTAL DUPLEX - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-HD	Single, 1.406" diameter	-	50

SINGLE GANG WEATHERPROOF COVER & DUPLEX RECEPTACLE - ALUMINUM



APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-DR	125V, 15A Duplex receptacle included	-	50

WEATHERPROOF BOX COVER AND DUPLEX RECEPTACLE - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65911-BCDR	-	-	50



TWO GANG WEATHERPROOF BOX MOUNT COVER DUPLEX & 1.406" DIAMETER - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65921-D20AB	(1) Duplex &(1) Single,1.406" dia.	-	50



TWO GANG WEATHERPROOF DEVICE MOUNT COVER (2) DUPLEX - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65921-2D	(2) Duplex	-	50



TWO GANG WEATHERPROOF DEYICE MOUNT COVER(2)1.406" DIAMETER HOLES - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65921-220A	(2) Single, 1.406" dia.	-	50



TWO GANG WEATHERPROOF COVER DUPLEX & 1.406" DIAMETER - ALUMINUM

c UL us
E360998

APPLICATION: For used to provide weatherproof protection for an outdoor receptacle.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65921-D20A	(1) Duplex &(1) Single,1.406" dia.	-	50





LAMPHOLDER

Lampholders.....17-18

LAMPHOLDER - ALUMINUM/ZINC

c UL us
E494921

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
50002	-	-	50



QUARTZ HALOGEN ALUMINUM/ZINC

c UL us
E494921

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
50001	-	-	50



KIT-ROUND SECURITY LIGHT - ALUMINUM/ZINC

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53001	-	-	50



SQUARE WEATHERPROOF COVER, ONE 1/2" HOLE LAMPHOLDER WITHOUT OUTER GASKET - ALUMINUM/ZINC

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53006	-	-	50



SQUARE WEATHERPROOF COVER, THREE 1/2"HOLE LAMPHOLDERS WITHOUT OUTER GASKET - ALUMINUM/ZINC

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53007	-	-	50



ROUND WEATHERPROOF COVER, ONE 1/2" HOLE LAMPHOLDER WITHOUT OUTER GASKET - ALUMINUM/ZINC

APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53008	(1)Lampholder	-	50



ROUND WEATHERPROOF COVER, THREE 1/2" HOLE LAMPHOLDERS WITHOUT OUTER GASKET - ALUMINUM/ZINC



APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53009	-	-	50

4" ROUND WEATHERPROOF BOX,FIVE 1/2" HOLES - ROUND WEATHERPROOF COVER, TMREE 1/2" HOLES - LAMPHOLDERS WITHOUT OUTER GASKET - ALUMINUM/ZINC



APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

c UL us
E494921

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
52001	-	-	50

1 - GANG WEATHERPROOF BOX, THREE 1/2" HOLES - SQUARE WEATHERPRDOF COVER, THREE 1/2" HOLES - LAMPHOLDERS WITHOUT OUTER GASKET - ALUMINUM/ZINC



APPLICATION: For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
53011	-	-	50

THREE TAPPED HOLE INCLUDE GASKET, SCREWS - ALUMINUM/ZINC



APPLICATION: For use with 4" round boxes.

c UL us
E494921

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
51002	-	-	50

RECTANGULAR COVER WITH 1/2" THREE HOLES-ALUMINUM/ZINC



APPLICATION: For use with rectangular boxes.

c UL us
E494921

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
51003	-	-	50



CONDUIT BODIES


Conduit Bodies.....19-25

Conduit Bodies Gasket.....26

Air Disconnect.....27


CONDUIT BODIES FOR EMT SET SCREW TYPE - ALUMINUM

APPLICATION: Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50AE	1/2"	-	100	4.359	1.330	2.060
LB-75AE	3/4"	-	100	4.972	1.552	2.370
LB-100AE	1"	-	50	5.819	1.747	2.630
LB-125AE	1-1/4"	-	20	7.795	2.491	3.680
LB-150AE	1-1/2"	-	20	7.795	2.491	3.680
LB-200AE	2"	-	10	9.850	3.123	4.310
LB-250AE	2-1/2"	-	1	12.673	4.444	4.450
LB-300AE	3"	-	1	12.583	4.459	4.450
LB-350AE	3-1/2"	-	1	15.661	5.590	5.800
LB-400AE	4"	-	1	15.661	5.590	5.800

c UL us E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50AE	1/2"	-	100	4.359	2.015	1.412
LL-75AE	3/4"	-	100	4.972	2.299	1.655
LL-100AE	1"	-	50	5.819	2.427	1.894
LL-125AE	1-1/4"	-	20	7.807	3.412	2.685
LL-150AE	1-1/2"	-	20	7.807	3.412	2.685
LL-200AE	2"	-	10	9.850	4.082	3.425
LL-250AE	2-1/2"	-	1	12.673	5.878	3.984
LL-300AE	3"	-	1	12.583	5.898	4.448
LL-350AE	3-1/2"	-	1	15.661	7.681	5.559
LL-400AE	4"	-	1	15.661	7.681	5.559

c UL us E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50AE	1/2"	-	100	4.359	2.015	1.412
LR-75AE	3/4"	-	100	4.972	2.299	1.655
LR-100AE	1"	-	50	5.819	2.427	1.894
LR-125AE	1-1/4"	-	20	7.807	3.412	2.685
LR-150AE	1-1/2"	-	20	7.807	3.412	2.685
LR-200AE	2"	-	10	9.850	4.082	3.425
LR-250AE	2-1/2"	-	1	12.673	5.878	3.984
LR-300AE	3"	-	1	12.583	5.898	4.448
LR-350AE	3-1/2"	-	1	15.661	7.681	5.559
LR-400AE	4"	-	1	15.661	7.681	5.559

c UL us E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50AE	1/2"	-	100	4.825	1.330	1.412
C-75AE	3/4"	-	100	5.646	1.552	1.655
C-100AE	1"	-	50	6.467	1.747	1.894
C-125AE	1-1/4"	-	20	8.268	2.491	2.685
C-150AE	1-1/2"	-	20	8.268	2.491	2.685
C-200AE	2"	-	10	10.232	3.123	3.425
C-250AE	2-1/2"	-	1	13.102	4.444	3.984
C-300AE	3"	-	1	13.067	4.459	4.448
C-350AE	3-1/2"	-	1	16.236	5.590	5.559
C-400AE	4"	-	1	16.236	5.590	5.559

c UL us E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50AE	1/2"	-	100	4.825	2.089	1.412
T-75AE	3/4"	-	50	5.646	2.241	1.655
T-100AE	1"	-	50	6.467	2.523	1.894
T-125AE	1-1/4"	-	20	8.268	3.460	2.685
T-150AE	1-1/2"	-	10	8.268	3.460	2.685
T-200AE	2"	-	10	10.232	4.089	3.425
T-250AE	2-1/2"	-	1	13.102	5.850	3.984
T-300AE	3"	-	1	13.067	5.850	4.448
T-350AE	3-1/2"	-	1	16.236	7.648	5.559
T-400AE	4"	-	1	16.236	7.648	5.559


c UL us E360998

CONDUIT BODIES FOR EMT SET SCREW TYPE WITH COVER & GASKET - ALUMINUM

APPLICATION: Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.


c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50AECG	1/2"	-	100	4.359	1.330	2.150
LB-75AECG	3/4"	-	100	4.972	1.552	2.430
LB-100AECG	1"	-	50	5.819	1.747	2.765
LB-125AECG	1-1/4"	-	20	7.795	2.491	3.840
LB-150AECG	1-1/2"	-	20	7.807	2.491	3.840
LB-200AECG	2"	-	10	9.850	3.123	4.275
LB-250AECG	2-1/2"	-	1	12.673	4.444	5.437
LB-300AECG	3"	-	1	12.583	4.459	5.675
LB-350AECG	3-1/2"	-	1	15.661	5.590	6.922
LB-400AECG	4"	-	1	15.661	5.590	6.922




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50AECG	1/2"	-	100	4.359	2.015	1.687
LL-75AECG	3/4"	-	100	4.972	2.299	1.900
LL-100AECG	1"	-	50	5.819	2.427	2.193
LL-125AECG	1-1/4"	-	20	7.795	3.412	3.008
LL-150AECG	1-1/2"	-	20	7.807	3.412	3.008
LL-200AECG	2"	-	10	9.850	4.082	3.736
LL-250AECG	2-1/2"	-	1	12.673	5.878	4.437
LL-300AECG	3"	-	1	12.583	5.898	4.933
LL-350AECG	3-1/2"	-	1	15.661	7.681	5.976
LL-400AECG	4"	-	1	15.661	7.681	5.976




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50AECG	1/2"	-	100	4.359	2.015	1.687
LR-75AECG	3/4"	-	100	4.972	2.299	1.900
LR-100AECG	1"	-	50	5.819	2.427	2.193
LR-125AECG	1-1/4"	-	20	7.795	3.412	3.008
LR-150AECG	1-1/2"	-	20	7.807	3.412	3.008
LR-200AECG	2"	-	10	9.850	4.082	3.736
LR-250AECG	2-1/2"	-	1	12.673	5.878	4.437
LR-300AECG	3"	-	1	12.583	5.898	4.933
LR-350AECG	3-1/2"	-	1	15.661	7.681	5.976
LR-400AECG	4"	-	1	15.661	7.681	5.976




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50AECG	1/2"	-	100	4.825	1.330	1.687
C-75AECG	3/4"	-	100	5.646	1.552	1.900
C-100AECG	1"	-	50	6.467	1.747	2.193
C-125AECG	1-1/4"	-	20	8.268	2.491	3.008
C-150AECG	1-1/2"	-	20	8.268	2.491	3.008
C-200AECG	2"	-	10	10.232	3.123	3.736
C-250AECG	2-1/2"	-	1	13.102	4.444	4.437
C-300AECG	3"	-	1	13.067	4.459	4.933
C-350AECG	3-1/2"	-	1	16.236	5.590	5.976
C-400AECG	4"	-	1	16.236	5.590	5.976



c UL us
E360998


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50AECG	1/2"	-	100	4.825	2.089	1.687
T-75AECG	3/4"	-	50	5.646	2.241	1.900
T-100AECG	1"	-	25	6.467	2.523	2.193
T-125AECG	1-1/4"	-	10	8.268	3.460	3.008
T-150AECG	1-1/2"	-	10	8.268	3.460	3.008
T-200AECG	2"	-	10	10.232	4.089	3.736
T-250AECG	2-1/2"	-	1	13.102	5.850	4.437
T-300AECG	3"	-	1	13.067	5.850	4.933
T-350AECG	3-1/2"	-	1	16.236	7.648	5.976
T-400AECG	4"	-	1	16.236	7.648	5.976






CONDUIT BODIES FOR EMT SET SCREW & RIGID THREAD TYPE - ALUMINUM

APPLICATION: Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50AA	1/2"	-	100	4.359	1.330	2.060
LB-75AA	3/4"	-	100	4.972	1.552	2.370
LB-100AA	1"	-	50	5.819	1.747	2.630
LB-125AA	1-1/4"	-	20	7.795	2.491	3.680
LB-150AA	1-1/2"	-	20	7.807	2.491	3.680
LB-200AA	2"	-	10	9.850	3.123	4.310

c UL us E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50AA	1/2"	-	100	4.359	2.015	1.412
LL-75AA	3/4"	-	100	4.972	2.299	1.655
LL-100AA	1"	-	50	5.819	2.427	1.894
LL-125AA	1-1/4"	-	20	7.807	3.412	2.685
LL-150AA	1-1/2"	-	20	7.807	3.412	2.685
LL-200AA	2"	-	10	9.850	4.082	3.425

c UL us E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50AA	1/2"	-	100	4.359	2.015	1.412
LR-75AA	3/4"	-	100	4.972	2.299	1.655
LR-100AA	1"	-	50	5.819	2.427	1.894
LR-125AA	1-1/4"	-	20	7.807	3.412	2.685
LR-150AA	1-1/2"	-	20	7.807	3.412	2.685
LR-200AA	2"	-	10	9.850	4.082	3.425

c UL us E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50AA	1/2"	-	100	4.825	1.330	1.412
C-75AA	3/4"	-	100	5.646	1.552	1.655
C-100AA	1"	-	50	6.467	1.747	1.894
C-125AA	1-1/4"	-	20	8.268	2.491	2.685
C-150AA	1-1/2"	-	20	8.268	2.491	2.685
C-200AA	2"	-	10	10.232	3.123	3.425

c UL us E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50AA	1/2"	-	100	4.825	2.089	1.412
T-75AA	3/4"	-	50	5.646	2.241	1.655
T-100AA	1"	-	50	6.467	2.523	1.894
T-125AA	1-1/4"	-	10	8.268	3.460	2.685
T-150AA	1-1/2"	-	10	8.268	3.460	2.685
T-200AA	2"	-	10	10.232	4.089	3.425


c UL us E360998

CONDUIT BODIES FOR EMT SET SCREW & RIGID THREAD TYPE WITH COVER & GASKET - ALUMINUM

APPLICATION: Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.


c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50AAE	1/2"	-	100	4.359	1.330	2.150
LB-75AAE	3/4"	-	100	4.972	1.552	2.430
LB-100AAE	1"	-	50	5.819	1.747	2.765
LB-125AAE	1-1/4"	-	20	7.795	2.491	3.840
LB-150AAE	1-1/2"	-	20	7.807	2.491	3.840
LB-200AAE	2"	-	10	9.850	3.123	4.275




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50AAE	1/2"	-	100	4.359	2.015	1.687
LL-75AAE	3/4"	-	100	4.972	2.299	1.900
LL-100AAE	1"	-	50	5.819	2.427	2.193
LL-125AAE	1-1/4"	-	20	7.807	3.412	3.008
LL-150AAE	1-1/2"	-	20	7.807	3.412	3.008
LL-200AAE	2"	-	10	9.850	4.082	3.736




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50AAE	1/2"	-	100	4.359	2.015	1.687
LR-75AAE	3/4"	-	100	4.972	2.299	1.900
LR-100AAE	1"	-	50	5.819	2.427	2.193
LR-125AAE	1-1/4"	-	20	7.807	3.412	3.008
LR-150AAE	1-1/2"	-	20	7.807	3.412	3.008
LR-200AAE	2"	-	10	9.850	4.082	3.736




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50AAE	1/2"	-	100	4.825	1.330	1.687
C-75AAE	3/4"	-	100	5.646	1.552	1.900
C-100AAE	1"	-	50	6.467	1.747	2.193
C-125AAE	1-1/4"	-	20	8.268	2.491	3.008
C-150AAE	1-1/2"	-	20	8.268	2.491	3.008
C-200AAE	2"	-	10	10.232	3.123	3.736




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50AAE	1/2"	-	100	4.825	2.089	1.687
T-75AAE	3/4"	-	50	5.646	2.241	1.900
T-100AAE	1"	-	25	6.467	2.523	2.193
T-125AAE	1-1/4"	-	10	8.268	3.460	3.008
T-150AAE	1-1/2"	-	10	8.268	3.460	3.008
T-200AAE	2"	-	10	10.232	4.089	3.736




CONDUIT BODIES FOR RIGID THREADED TYPE - ALUMINUM

APPLICATION: Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50A	1/2"	-	100	4.359	1.330	2.060
LB-75A	3/4"	-	100	4.972	1.552	2.370
LB-100A	1"	-	50	5.819	1.747	2.630
LB-125A	1-1/4"	-	20	7.795	2.491	3.680
LB-150A	1-1/2"	-	20	7.795	2.491	3.680
LB-200A	2"	-	10	9.850	3.123	4.310
LB-250A	2-1/2"	-	1	12.673	4.444	4.450
LB-300A	3"	-	1	12.583	4.459	4.450
LB-350A	3-1/2"	-	1	15.661	5.590	5.800
LB-400A	4"	-	1	15.661	5.590	5.800

c UL us
E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50A	1/2"	-	100	4.359	2.015	1.412
LL-75A	3/4"	-	100	4.972	2.299	1.655
LL-100A	1"	-	50	5.819	2.427	1.894
LL-125A	1-1/4"	-	20	7.807	3.412	2.685
LL-150A	1-1/2"	-	20	7.807	3.412	2.685
LL-200A	2"	-	10	9.850	4.082	3.425
LL-250A	2-1/2"	-	1	12.673	5.878	3.984
LL-300A	3"	-	1	12.583	5.898	4.448
LL-350A	3-1/2"	-	1	15.661	7.681	5.559
LL-400A	4"	-	1	15.661	7.681	5.559

c UL us
E360998




CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50A	1/2"	-	100	4.359	2.015	1.412
LR-75A	3/4"	-	100	4.972	2.299	1.655
LR-100A	1"	-	50	5.819	2.427	1.894
LR-125A	1-1/4"	-	20	7.807	3.412	2.685
LR-150A	1-1/2"	-	20	7.807	3.412	2.685
LR-200A	2"	-	10	9.850	4.082	3.425
LR-250A	2-1/2"	-	1	12.673	5.878	3.984
LR-300A	3"	-	1	12.583	5.898	4.448
LR-350A	3-1/2"	-	1	15.661	7.681	5.559
LR-400A	4"	-	1	15.661	7.681	5.559

c UL us
E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50A	1/2"	-	100	4.825	1.330	1.412
C-75A	3/4"	-	100	5.646	1.552	1.655
C-100A	1"	-	50	6.467	1.747	1.894
C-125A	1-1/4"	-	20	8.268	2.491	2.685
C-150A	1-1/2"	-	20	8.268	2.491	2.685
C-200A	2"	-	10	10.232	3.123	3.425
C-250A	2-1/2"	-	1	13.102	4.444	3.984
C-300A	3"	-	1	13.067	4.459	4.448
C-350A	3-1/2"	-	1	16.236	5.590	5.559
C-400A	4"	-	1	16.236	5.590	5.559

c UL us
E360998



CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50A	1/2"	-	100	4.825	2.089	1.412
T-75A	3/4"	-	50	5.646	2.241	1.655
T-100A	1"	-	50	6.467	2.523	1.894
T-125A	1-1/4"	-	10	8.268	3.460	2.685
T-150A	1-1/2"	-	10	8.268	3.460	2.685
T-200A	2"	-	10	10.232	4.089	3.425
T-250A	2-1/2"	-	1	13.102	5.850	3.984
T-300A	3"	-	1	13.067	5.850	4.448
T-350A	3-1/2"	-	1	16.236	7.648	5.559
T-400A	4"	-	1	16.236	7.648	5.559


c UL us
E360998

CONDUIT BODIES FOR RIGID THREADED TYPE WITH COVERS & GASKETS - ALUMINUM

APPLICATION: Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.


c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LB-50ACG	1/2"	-	100	4.359	1.330	2.150
LB-75ACG	3/4"	-	100	4.972	1.552	2.430
LB-100ACG	1"	-	50	5.819	1.747	2.765
LB-125ACG	1-1/4"	-	20	7.807	2.491	3.840
LB-150ACG	1-1/2"	-	20	7.807	2.491	3.840
LB-200ACG	2"	-	10	9.850	3.123	4.275
LB-250ACG	2-1/2"	-	1	12.673	4.444	5.437
LB-300ACG	3"	-	1	12.583	4.459	5.675
LB-350ACG	3-1/2"	-	1	15.661	5.590	6.922
LB-400ACG	4"	-	1	15.661	5.590	6.922




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LL-50ACG	1/2"	-	100	4.359	2.015	1.687
LL-75ACG	3/4"	-	100	4.972	2.299	1.900
LL-100ACG	1"	-	50	5.819	2.427	2.193
LL-125ACG	1-1/4"	-	20	7.807	3.412	3.008
LL-150ACG	1-1/2"	-	20	7.807	3.412	3.008
LL-200ACG	2"	-	10	9.850	4.082	3.736
LL-250ACG	2-1/2"	-	1	12.673	5.878	4.437
LL-300ACG	3"	-	1	12.583	5.898	4.933
LL-350ACG	3-1/2"	-	1	15.661	7.681	5.976
LL-400ACG	4"	-	1	15.661	7.681	5.976




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LR-50ACG	1/2"	-	100	4.359	2.015	1.687
LR-75ACG	3/4"	-	100	4.972	2.299	1.900
LR-100ACG	1"	-	50	5.819	2.427	2.193
LR-125ACG	1-1/4"	-	20	7.807	3.412	3.008
LR-150ACG	1-1/2"	-	20	7.807	3.412	3.008
LR-200ACG	2"	-	10	9.850	4.082	3.736
LR-250ACG	2-1/2"	-	1	12.673	5.878	4.437
LR-300ACG	3"	-	1	12.583	5.898	4.933
LR-350ACG	3-1/2"	-	1	15.661	7.681	5.976
LR-400ACG	4"	-	1	15.661	7.681	5.976




c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
C-50ACG	1/2"	-	100	4.825	1.330	1.687
C-75ACG	3/4"	-	100	5.646	1.552	1.900
C-100ACG	1"	-	50	6.467	1.747	2.193
C-125ACG	1-1/4"	-	20	8.268	2.491	3.008
C-150ACG	1-1/2"	-	20	8.268	2.491	3.008
C-200ACG	2"	-	10	10.232	3.123	3.736
C-250ACG	2-1/2"	-	1	13.102	4.444	4.437
C-300ACG	3"	-	1	13.067	4.459	4.933
C-350ACG	3-1/2"	-	1	16.236	5.590	5.976
C-400ACG	4"	-	1	16.236	5.590	5.976



c UL us
E360998


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
T-50ACG	1/2"	-	100	4.825	2.089	1.687
T-75ACG	3/4"	-	50	5.646	2.241	1.900
T-100ACG	1"	-	25	6.467	2.523	2.193
T-125ACG	1-1/4"	-	10	8.268	3.460	3.008
T-150ACG	1-1/2"	-	10	8.268	3.460	3.008
T-200ACG	2"	-	10	10.232	4.089	3.736
T-250ACG	2-1/2"	-	1	13.102	5.850	4.437
T-300ACG	3"	-	1	13.067	5.850	4.933
T-350ACG	3-1/2"	-	1	16.236	7.648	5.976
T-400ACG	4"	-	1	16.236	7.648	5.976





SERVICE ENTRANCE ELBOWS - ALUMINUM






APPLICATION: Use to gain access to the interior of a raceway for wire pulling, inspections, and maintenance. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LBS-050	1/2"	-	100	3.165	1.378	1.620
LBS-075	3/4"	-	50	3.585	1.700	1.931
LBS-100	1"	-	50	4.235	1.932	2.139
LBS-125	1-1/4"	-	50	5.415	2.426	2.566
LBS-150	1-1/2"	-	50	6.105	2.598	2.598
LBS-200	2"	-	20	6.635	3.104	3.080

c UL us
E315256

MOGUL CONDUIT BODIES (TYPE LB) RIGID CONDUIT-ALUMINUM






APPLICATION: Use to gain access to the interior of a raceway for wire pulling, splicing (with limitations as specified by the NEC), and maintenance. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LBM-125	1-1/4"	-	2	3.484	9.646	2.539
LBM-150	1-1/2"	-	1	5.354	14.705	3.130
LBM-200	2"	-	1	5.354	14.705	3.130

c UL us
E360998

ALUMINUM CONDUIT BODIES THREADED FOR RIGID CONDUIT COMBO TYPE-THREADED FOR RIGID CONDUIT & SET SCREW FOR EMT CONDUIT





APPLICATION: Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
LRL-50AAE/LRL-050	1/2"	-	50	4.37	1.06	2.01
LRL-75AAE/LRL-075	3/4"	-	20	5.12	1.31	2.27
LRL-100AAE/LRL-100	1"	-	50	5.99	1.56	2.74
LRL-125AAE/LRL-125	1-1/4"	-	20	7.80	2.20	3.41
LRL-150AAE/LRL-150	1-1/2"	-	20	7.80	2.20	3.41
LRL-200AAE/LRL-200	2"	-	10	10.1	2.70	4.19


c UL us
E360998

COVERS - WITH CAPTIVE SCREWS - ALUMINUM DIE CAST

APPLICATION: Used to replace broken or missing covers on conduit bodies to keep them sealed and secure. Indoor only.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76001-AL	1/2"	50	500	3.857	1.303
76002-AL	3/4"	50	500	4.630	1.523
76003-AL	1"	50	250	5.329	1.710
76004-AL	1-1/4" - 1-1/2"	10	50	7.224	2.442
76005-AL	2"	10	50	9.448	3.088
76006-AL	2 1/2"-3"	-	25	12.165	4.420
76007-AL	3 1/2" - 4"	-	20	14.961	5.505




COVERS - WITH CAPTIVE SCREWS - STEEL

APPLICATION: Used to replace broken or missing covers on conduit bodies to keep them sealed and secure. Indoor only.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76001-ST	1/2"	50	500	3.937	1.300
76002-ST	3/4"	50	500	4.667	1.575
76003-ST	1"	50	250	5.350	1.730
76004-ST	1-1/4" - 1-1/2"	10	50	7.205	2.495
76005-ST	2"	10	50	9.488	3.135
76006-ST	2 1/2"-3"	-	25	12.187	4.440
76007-ST	3 1/2" - 4"	-	20	14.937	5.500



COVERS - WITH CAPTIVE SCREWS - STAMPED ALUMINUM

APPLICATION: Used to replace broken or missing covers on conduit bodies to keep them sealed and secure. Indoor only.

c UL us
E360998


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76001-SA	1/2"	50	500	3.937	1.300
76002-SA	3/4"	50	500	4.667	1.575
76003-SA	1"	50	250	5.350	1.730
76004-SA	1 1/4" - 1 1/2"	10	50	7.205	2.495
76005-SA	2"	10	50	9.488	3.135
76006-SA	2 1/2"-3"	-	25	12.187	4.440
76007-SA	3 1/2" - 4"	-	20	14.937	5.500




NEOPRENE GASKET

APPLICATION: Used to replace broken or missing covers on conduit bodies to keep them sealed and secure. Indoor only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
76001-SN	1/2"	-	500	3.937	1.300
76002-SN	3/4"	-	500	4.667	1.575
76003-SN	1"	-	250	5.350	1.730
76004-SN	1 1/4" - 1 1/2"	-	100	7.205	2.495
76005-SN	2"	-	100	9.488	3.135
76006-SN	2 1/2"-3"	-	50	12.187	4.440
76007-SN	3 1/2" - 4"	-	50	14.937	5.500



AC DISCONNECT NON-FUSED - STEEL




APPLICATION: Used to stop the power from going to an air conditioner unit to allow for safe working conditions. 120/240 VOLTS.

c UL us
E539948

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
YACD60A	60AMP	1	10	5.138	7.449	2.783
ACD60AS	60AMP-Service Equipment	1	10	5.138	7.449	2.783

AC DISCONNECT FUSED - STEEL




APPLICATION: Used to stop the power from going to an air conditioner unit to allow for safe working conditions. 120/240 VOLTS.

c UL us
E539948

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
YACDF30A	30AMP	1	10	5.138	9.252	2.783
ACDF30AS	30AMP-Service Equipment	1	10	5.138	9.252	2.783
YACDF60A	60AMP	1	10	5.138	9.252	2.783
ACDF60AS	60AMP-Service Equipment	1	10	5.138	9.252	2.783

AC DISCONNECT NON-FUSED SIDE OPENING - STEEL




APPLICATION: Used to stop the power from going to an air conditioner unit to allow for safe working conditions. 120/240 VOLTS.

c UL us
E539948

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
YACD60A-SOD	60AMP	1	10	5.138	7.449	2.783
ACD60AS-SOD	60AMP-Service Equipment	1	10	5.138	7.449	2.783

AC DISCONNECT FUSED SIDE OPENING - STEEL

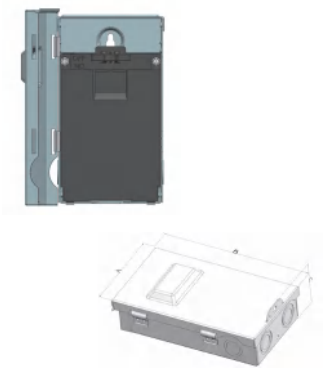

APPLICATION: Used to stop the power from going to an air conditioner unit to allow for safe working conditions. 120/240 VOLTS.

c UL us
E539948

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
YACDF30A-SOD	30AMP	1	10	5.138	9.252	2.783
ACDF30AS-SOD	30AMP-Service Equipment	1	10	5.138	9.252	2.783
YACDF60A-SOD	60AMP	1	10	5.138	9.252	2.783
ACDF60AS-SOD	60AMP-Service Equipment	1	10	5.138	9.252	2.783




EMT & RIGID

Emt Fittings.....28-31
Raintight Fittings.....32-33
Pull Elbows.....34-37
Emt Conduit & Elbow.....38
Emt & Rigid Strap.....39-44
Rigid Connectors.....45-54
Rigid & Imc Elbows.....55-56
Rigid Nipple & Close.....57-58

EMT CONNECTORS - SET SCREW TYPE - STEEL






APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66001	1/2"	50	500	1.314	0.407	0.848
66002	3/4"	25	250	1.468	0.417	1.057
66003	1"	20	200	1.685	0.492	1.338
66004	1 1/4"	-	25	2.106	0.574	1.688
66005	1 1/2"	-	25	2.283	0.633	1.929
66006	2"	-	20	2.598	0.720	2.381
66007	2 1/2"	-	12	3.299	0.720	3.161
66008	3"	-	12	3.779	0.889	3.787
66009	3 1/2"	-	6	3.921	0.889	4.283
66010	4"	-	6	4.039	0.889	4.803

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT CONNECTORS - SET SCREW TYPE - WITH INSULATED THROAT - STEEL






APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66001-A	1/2"	50	500	1.370	0.460	0.848
66002-A	3/4"	25	250	1.535	0.488	1.057
66003-A	1"	20	200	1.744	0.551	1.338
66004-A	1 1/4"	-	25	2.185	0.653	1.688
66005-A	1 1/2"	-	25	2.362	0.712	1.929
66006-A	2"	-	20	2.677	0.799	2.381
66007-A	2 1/2"	-	12	3.378	0.799	3.161
66008-A	3"	-	12	3.858	0.799	3.787
66009-A	3 1/2"	-	6	4.000	0.968	4.283
66010-A	4"	-	6	4.118	0.968	4.803

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT COUPLINGS - SET SCREW TYPE - STEEL





APPLICATION: Used to connect two lengths of EMT.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
66201	1/2"	50	500	1.582	0.848
66202	3/4"	25	250	1.811	1.057
66203	1"	10	100	2.047	1.338
66204	1 1/4"	-	25	2.724	1.688
66205	1 1/2"	-	25	3.007	1.929
66206	2"	-	20	3.248	2.381
66207	2 1/2"	-	12	4.094	3.161
66208	3"	-	12	4.350	3.787
66209	3 1/2"	-	6	4.574	4.283
66210	4"	-	6	4.724	4.803

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"


EMT CONNECTORS - COMPRESSION TYPE - STEEL

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66101	1/2"	25	250	1.709	0.417	1.079
66102	3/4"	25	250	1.823	0.421	1.299
66103	1"	10	100	2.059	0.449	1.543
66104	1 1/4"	-	25	2.429	0.578	1.886
66105	1 1/2"	-	10	2.736	0.591	2.106
66106	2"	-	10	2.965	0.713	2.575
66107	2 1/2"	-	12	3.724	0.795	3.406
66108	3"	-	12	4.335	0.878	4.063
66109	3 1/2"	-	6	4.303	0.858	4.543
66110	4"	-	6	4.543	0.909	5.059






EMT CONNECTOR-COMPRESSION TYPE - WITH INSULATED THROAT - STEEL

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66101-A	1/2"	25	250	1.749	0.457	1.079
66102-A	3/4"	25	250	1.863	0.461	1.299
66103-A	1"	10	100	2.099	0.489	0.543
66104-A	1 1/4"	-	25	2.469	0.618	1.886
66105-A	1 1/2"	-	10	2.776	0.631	2.106
66106-A	2"	-	10	3.005	0.753	2.575
66107-A	2 1/2"	-	12	3.764	0.835	3.406
66108-A	3"	-	12	4.375	0.918	4.063
66109-A	3 1/2"	-	6	4.343	0.898	4.543
66110-A	4"	-	6	4.583	0.949	5.059






EMT COUPLING - COMPRESSION TYPE - STEEL

APPLICATION: Used to connect two lengths of EMT.

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
66301	1/2"	25	250	2.055	1.079
66302	3/4"	25	250	2.185	1.299
66303	1"	10	100	2.323	1.543
66304	1 1/4"	-	25	2.854	1.886
66305	1 1/2"	-	10	2.992	2.106
66306	2"	-	10	2.913	2.575
66307	2 1/2"	-	12	4.815	3.406
66308	3"	-	12	5.220	4.063
66309	3 1/2"	-	6	5.425	4.543
66310	4"	-	6	5.276	5.059








EMT CONNECTORS - SET SCREW TYPE - ZINC DIE CAST






APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88036	1/2"	50	500	1.157	0.382	0.933
88037	3/4"	25	250	1.78	0.366	1.169
88038	1"	20	200	1.504	0.500	1.421
88039	1 1/4"	-	25	1.969	0.575	1.823
88040	1 1/2"	-	25	2.260	0.732	2.067
88041	2"	-	20	2.563	0.736	2.524
88042	2 1/2"	-	12	3.090	1.047	3.295
88043	3"	-	12	3.374	1.059	3.909
88044	3 1/2"	-	6	3.460	1.059	4.460
88045	4"	-	6	3.759	1.110	4.881

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT CONNECTOR - SET SCREW WITH INSULATED THROAT - ZINC DIE CAST






APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88036-A	1/2"	50	500	1.196	0.421	0.933
88037-A	3/4"	25	250	1.417	0.405	1.169
88038-A	1"	50	200	1.543	0.539	1.421
88039-A	1 1/4"	-	25	2.008	0.654	1.823
88040-A	1 1/2"	-	25	2.299	0.811	2.067
88041-A	2"	-	20	2.602	0.815	2.524
88042-A	2 1/2"	-	12	3.149	1.106	3.295
88043-A	3"	-	12	3.433	1.118	3.909
88044-A	3 1/2"	-	6	3.519	1.118	4.460
88045-A	4"	-	6	3.818	1.169	4.811

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT COUPLING - SET SCREW TYPE - ZINC DIE CAST





APPLICATION: Used to connect two lengths of EMT.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88062	1/2"	50	500	1.488	0.905
88063	3/4"	25	250	1.944	1.177
88064	1"	20	200	2.275	1.413
88065	1 1/4"	-	25	2.618	1.822
88066	1 1/2"	-	25	2.909	2.039
88067	2"	-	20	3.476	2.515
88068	2 1/2"	-	12	4.011	3.303
88069	3"	-	12	4.460	3.913
88070	3 1/2"	-	6	4.85	4.520
88071	4"	-	6	5.248	4.909

c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"


EMT CONNECTORS - COMPRESSION TYPE - ZINC DIE CAST

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

c UL US
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88046	1/2"	50	500	1.256	0.965	0.433
88047	3/4"	25	250	1.209	1.264	0.433
88048	1"	15	150	1.575	1.516	0.547
88049	1 1/4"	10	100	1.618	1.906	0.575
88050	1 1/2"	-	10	1.874	2.276	0.622
88051	2"	-	10	2.146	2.610	0.756
88052	2 1/2"	-	12	2.610	3.311	1.004
88053	3"	-	12	2.790	4.210	1.004
88054	3 1/2"	-	10	2.770	5.060	0.940
88055	4"	-	6	2.839	5.350	1.087






EMT CONNECTOR - COMPRESSION TYPE WITH INSULATING THROAT - ZINC DIE CAST

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

c UL US
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88046-A	1/2"	50	500	1.315	0.965	0.492
88047-A	3/4"	25	250	1.268	1.264	0.492
88048-A	1"	15	150	1.643	1.516	0.606
88049-A	1 1/4"	10	100	1.697	1.906	0.654
88050-A	1 1/2"	-	10	1.953	2.276	0.701
88051-A	2"	-	10	2.225	2.610	0.835
88052-A	2 1/2"	-	12	2.689	3.311	1.083
88053-A	3"	-	12	2.869	4.210	1.083
88054-A	3 1/2"	-	10	2.849	5.060	1.019
88055-A	4"	-	6	2.918	5.350	1.166






EMT COUPLING - COMPRESSION TYPE - ZINC DIE CAST

APPLICATION: Used to connect two lengths of EMT.

c UL US
E315281
1/2"-2"
E315256
2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88072	1/2"	50	500	1.531	0.965
88073	3/4"	25	250	1.579	1.264
88074	1"	15	150	1.870	1.516
88075	1 1/4"	5	50	2.248	1.906
88076	1 1/2"	-	10	3.181	2.276
88077	2"	-	10	2.437	2.610
88078	2 1/2"	-	12	3.362	3.311
88079	3"	-	12	3.349	4.210
88080	3 1/2"	-	10	3.510	5.060
88081	4"	-	6	3.573	5.350








EMT CONNECTORS COMPRESSION TYPE RAINTIGHT - STEEL

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66101-R	1/2"	25	250	0.689	0.500	1.125
66102-R	3/4"	25	250	0.750	0.500	1.375
66103-R	1"	10	100	0.846	0.562	1.687
66104-R	1 1/4"	-	25	1.687	1.012	2.062
66105-R	1 1/2"	-	10	1.717	1.062	2.250
66106-R	2"	-	10	1.875	1.125	2.750
66107-R	2 1/2"	-	12	1.968	1.562	3.625
66108-R	3"	-	12	2.689	1.562	4.250
66109-R	3 1/2"	-	6	2.812	1.812	4.687
66110-R	4"	-	6	2.812	1.812	5.187

Patent
1/2"-2"
c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT CONNECTORS COMPRESSION TYPE RAINTIGHT WITH INSULATED THROAT - STEEL

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66101-RA	1/2"	25	250	0.689	0.500	1.125
66102-RA	3/4"	25	250	0.750	0.500	1.375
66103-RA	1"	15	150	0.846	0.562	1.687
66104-RA	1 1/4"	-	25	1.687	1.012	2.062
66105-RA	1 1/2"	-	10	1.717	1.062	2.250
66106-RA	2"	-	10	1.875	1.125	2.750
66107-RA	2 1/2"	-	12	1.968	1.562	3.625
66108-RA	3"	-	12	2.689	1.562	4.250
66109-RA	3 1/2"	-	6	2.812	1.812	4.687
66110-RA	4"	-	6	2.812	1.812	5.187

Patent
1/2"-2"
c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

EMT COUPLINGS COMPRESSION TYPE RAINTIGHT - STEEL

APPLICATION: Used to connect two lengths of EMT,raintight type.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
66301-R	1/2"	25	250	1.625	1.125
66302-R	3/4"	20	200	1.750	1.375
66303-R	1"	10	100	1.875	1.687
66304-R	1 1/4"	-	25	2.250	2.062
66305-R	1 1/2"	-	10	2.250	2.250
66306-R	2"	-	10	2.375	2.750
66307-R	2 1/2"	-	12	3.875	3.625
66308-R	3"	-	12	4.000	4.250
66309-R	3 1/2"	-	6	4.687	4.687
66310-R	4"	-	6	4.937	5.187

Patent
1/2"-2"
c UL us
E315281
1/2"-2"
E315256
2 1/2"-4"

RAINTIGHT COMPRESSION CONNECTORS - ZINC DIE CAST

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

Patent 1/2"-2"


c UL us

E315281 1/2"-2"

E315256 2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
89001	1/2"	50	500	1.256	0.965	0.433
89002	3/4"	25	250	1.209	1.264	0.433
89003	1"	15	150	1.575	1.516	0.547
89004	1 1/4"	-	25	1.618	1.906	0.575
89005	1 1/2"	-	25	1.874	2.276	0.622
89006	2"	-	20	2.146	2.610	0.756
89007	2 1/2"	-	12	2.610	3.311	1.004
89008	3"	-	12	2.790	4.210	1.004
89009	3 1/2"	-	10	2.770	5.060	1.084
89010	4"	-	6	0.839	5.350	1.087





RAINTIGHT COMPRESSION CONNECTORS WITH INSULATING THROAT - ZINC DIE CAST

APPLICATION: Used to connect EMT to steel outlet box or other metal enclosure.

Patent 1/2"-2"


c UL us

E315281 1/2"-2"

E315256 2 1/2"-4"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
89001-A	1/2"	50	500	1.315	0.965	0.492
89002-A	3/4"	25	250	1.268	1.264	0.492
89003-A	1"	15	150	1.643	1.516	0.606
89004-A	1 1/4"	-	25	1.697	1.906	0.654
89005-A	1 1/2"	-	25	1.953	2.276	0.701
89006-A	2"	-	20	2.225	2.610	0.835
89007-A	2 1/2"	-	12	2.689	3.311	1.083
89008-A	3"	-	12	2.869	4.210	1.083
89009-A	3 1/2"	-	10	2.849	5.060	1.019
89010-A	4"	-	6	2.918	5.350	1.166





RAINTIGHT COMPRESSION COUPLINGS - ZINC DIE CAST

APPLICATION: Used to connect two lengths of EMT,raintight type.

Patent 1/2"-2"


c UL us

E315281 1/2"-2"

E315256 2 1/2"-4"


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
89201	1/2"	50	500	1.531	0.965
89202	3/4"	25	250	1.579	1.264
89203	1"	15	150	1.870	1.516
89204	1 1/4"	10	100	2.248	1.906
89205	1 1/2"	-	10	3.181	2.276
89206	2"	-	10	2.437	2.610
89207	2 1/2"	-	12	3.362	3.311
89208	3"	-	12	3.349	4.210
89209	3 1/2"	-	10	3.510	5.060
89210	4"	-	6	3.573	5.350





EMT TWO PC CONNECTOR - ZINC DIE CAST






APPLICATION: Used to connect EMT conduit to steel outlet box, load center, or other metal enclosure. Indoors only.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85371	1/2"	-	500	0.945	-

COMBINATION COUPLINGS - EMT TO ROMEX & FLEX - ZINC DIE CAST






APPLICATION: Used to connect EMT to flexible metal conduit or NM cable.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
82042	3/8" - 1/2"	-	500	1.318	1.173

PULL ELBOWS - EMT TO EMT - ZINC DIE CAST






APPLICATION: Used to make a 90° connection with two runs of EMT, or to an enclosure.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85088	1/2"	10	100	1.311	0.961
85089	3/4"	5	50	1.385	1.230
85090	1"	-	25	1.961	1.516
85091	1 1/4"	-	20	2.303	1.890

PULL ELBOWS - EMT TO BOX - ZINC DIE CAST





APPLICATION: Used to make a 90° connection with two runs of EMT, or to an enclosure.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85301	1/2"	10	100	1.311	0.961
85302	3/4"	5	50	1.385	1.230
85303	1"	-	25	1.961	1.516
85304	1 1/4"	-	20	2.303	1.890


COMBINATION COUPLINGS (E.M.T. TO FLEXIBLE CONDUIT) - ZINC DIE CAST

c UL us
E315256

APPLICATION: Used to connect EMT to flexible metal conduit or NM cable.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
82043	1/2" TO 1/2"	25	250	1.646	1.417
82044	3/4" TO 3/4"	25	250	1.972	1.547






COMBINATION COUPLINGS - EMT TO BX, SET SCREW TYPE - ZINC DIE CAST

c UL us
E315256

APPLICATION: Used to connect EMT to BX cable.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85701	1/2" TO 1/2"	50	500	1.26	0.724	0.614






PULL ELBOWS - EMT/RIGID TO EMT/RIGID - ZINC DIE CAST

c UL us
E315256

APPLICATION: Used to make a 90° connection with two runs of threaded rigid conduit, IMC, EMT or to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
86201	1/2"	-	100	1.311	0.961
86202	3/4"	-	50	1.385	1.230
86203	1"	-	25	1.961	1.516
86204	1 1/4"	-	20	2.303	1.890






PULL ELBOWS - EMT/RIGID TO BOX - ZINC DIE CAST

c UL us
E315256

APPLICATION: Used to make a 90° connection with two runs of threaded rigid conduit, IMC, EMT or to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
86101	1/2"	-	100	1.311	0.961
86102	3/4"	-	50	1.385	1.230
86103	1"	-	25	1.961	1.516
86104	1 1/4"	-	20	2.303	1.890








EMT 90° ANGLE CONNECTORS SET SCREW TYPE - ZINC DIE CAST






APPLICATION: Use to connect EMT to metal outlet box or enclosure.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85367	1/2"	10	100	1.693	0.945	0.535
85368	3/4"	5	50	1.967	1.165	0.535
85369	1"	5	50	1.967	1.417	0.535

EMT OFFSET CONNECTORS - EMT TO BOX - SET SCREW TYPE - ZINC DIE CAST






APPLICATION: Use to connect EMT to metal outlet box or enclosure.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85321	1/2"	25	250	2.067	0.925	0.406
85322	3/4"	20	200	3.024	1.114	0.465
85323	1"	10	100	3.150	1.417	0.512

EMT 90° ANGLE CONNECTORS COMPRESSION TYPE - ZINC DIE CAST






APPLICATION: Use to connect EMT to metal outlet box or enclosure.

c UL us
E315281

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85361	1/2"	10	100	1.750	0.830	0.520
85362	3/4"	10	100	1.860	0.950	0.520
85363	1"	-	10	2.210	1.120	0.670

EMT TO BOX - COMPRESSION TYPE - ZINC DIE CAST





APPLICATION: Use to connect EMT to metal outlet box or enclosure.

c UL us
E315281


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85351	1/2"	10	100	2.130	1.000	0.406
85352	3/4"	10	100	2.900	1.190	0.465
85353	1"	10	100	-	-	-

90° SET - SCREW ELBOW - ZINC DIE CAST

E315281

APPLICATION: Use to connect EMT to metal outlet box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85391	1/2"	10	100	1.444	1.400	0.521
85392	3/4"	5	50	1.900	1.642	0.518

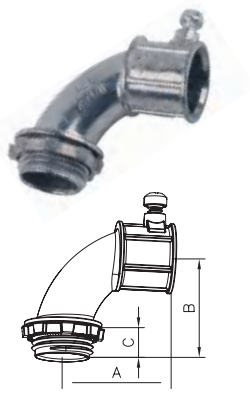


EMT PULL ELBOWS - INSIDE CORNER - SET SCREW TYPE - ZINC DIE CAST

E315281

APPLICATION: Used to connect two lengths of EMT on a 90° inside corner.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85601	1/2"	10	100	2.295	0.933
85602	3/4"	5	50	2.610	1.122

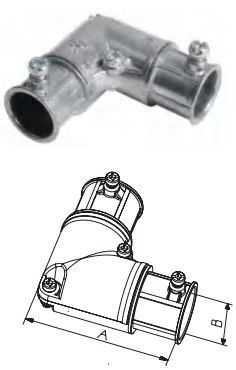


90° COMPRESSION ELBOWS - ZINC DIE CAST

E315281

APPLICATION: Use to connect EMT conduit to a steel outlet box or enclosure where a close radius is desired. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
02805	1/2"	10	100	1.595	1.451	0.521
02807	3/4"	5	50	1.882	1.675	0.521

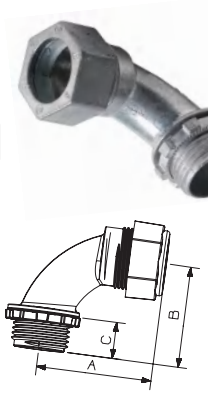

90° LARGE RADIUS ADAPTER ELBOWS - ZINC DIE CAST

E315256

APPLICATION: Used to connect threaded rigid conduit or IMC to a steel box or other enclosure where a close radius is desired.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
19205	1/2"	10	100	1.294	1.450	0.521
19207	3/4"	5	50	1.526	1.690	0.521



ELECTRICAL METALLIC TUBING (E.M.T.) - STEEL




APPLICATION: EMT Conduit 10'/3.05M.

CATALOG NUMBER	TRADE SIZE	OUTSIDE (MM)	THICKNESS (MM)
98101	1/2"	17.93	1.07
98102	3/4"	23.42	1.24
98103	1"	29.54	1.45
98104	1 1/4"	38.40	1.60
98105	1 1/2"	44.20	1.65
98106	2"	55.80	1.65
98107	2 1/2"	73.03	1.83
98108	3"	88.90	1.83
98109	3 1/2"	101.60	2.10
98110	4"	114.30	2.11

c UL us
E315280

EMT ELBOWS - 45° - STEEL






APPLICATION: Used to connect EMT conduit together to allow for 45° bends. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	OUTSIDE (MM)	MASTER CARTON	L×W×H	
				A(MIN)	R
90101	1/2"	-	150	1.500	4.000
90102	3/4"	-	50	1.500	4.500
90103	1"	-	50	1.875	5.750
90104	1 1/4"	-	30	2.000	7.250
90105	1 1/2"	-	20	2.000	8.250
90106	2"	-	8	2.000	9.500
90107	2 1/2"	-	1	3.000	10.500
90108	3"	-	1	3.125	13.000
90109	3 1/2"	-	1	3.250	15.000
90110	4"	-	1	3.375	16.000

c UL us
E315280

EMT ELBOWS - 90° - STEEL





APPLICATION: Used to connect EMT conduit together to allow for 90° bends. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A(MIN)	R
90001	1/2"	-	50	1.500	4.000
90002	3/4"	-	50	1.500	4.500
90003	1"	-	25	1.875	5.750
90004	1 1/4"	-	20	2.000	7.250
90005	1 1/2"	-	20	2.000	8.250
90006	2"	-	12	2.000	9.500
90007	2 1/2"	-	1	3.000	10.500
90008	3"	-	1	3.125	13.000
90009	3 1/2"	-	1	3.250	15.000
90010	4"	-	1	3.375	16.000

c UL us
E315280


EMT STRAP ONE HOLE - STEEL

APPLICATION: Used to support EMT where greater load bearing is required.

c UL us
E331642

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62021	1/2"	100	1000	1.657	0.571	0.665
62022	3/4"	50	500	1.937	0.646	0.933
62023	1"	50	500	2.276	0.772	1.110
62024	1 1/4"	-	50	2.858	0.878	1.480
62025	1 1/2"	-	25	3.126	1.000	1.673
62026	2"	-	25	3.921	1.138	2.020
62027	2 1/2"	-	50	5.012	1.173	2.602
62028	3"	-	25	5.374	1.215	3.291
62029	3 1/2"	-	25	6.390	1.254	4.248
62030	4"	-	25	6.850	1.157	4.177






EMT STRAP - TWO HOLES - STEEL

APPLICATION: Used to support EMT where greater load bearing is required.

c UL us
E331642

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62121	1/2"	100	1000	2.240	0.574	0.732
62122	3/4"	100	1000	2.756	0.636	0.965
62123	1"	50	500	3.252	0.713	1.157
62124	1 1/4"	25	250	3.831	0.748	1.453
62125	1 1/2"	-	100	4.323	0.791	1.957
62126	2"	-	20	4.925	1.004	2.205
62127	2 1/2"	-	25	6.106	1.004	2.969
62128	3"	-	25	6.772	1.004	3.539
62129	3 1/2"	-	25	7.425	1.004	4.110
62130	4"	-	25	9.366	1.016	4.508






HANGERS FOR RIGID CONDUIT, IMC CONDUIT & EMT - WITH BOLTS (ASSEMBLED) - STEEL

APPLICATION: Use to secure and suspend conduit from overhead supports. Indoors or outdoors.

c UL us
E331642


CATALOG NUMBER	FOR EMT	FOR RGD	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
62501	1/2"	3/8"&1/2"	50	500	1.929	0.752	0.752
62502	3/4"	3/4"	-	50	2.280	0.886	0.945
62503	1"	1"	-	50	2.516	0.886	0.913
62504	1 1/4"	-	-	50	3.024	0.886	1.051
62505	1 1/2"	1 1/4"	-	50	3.386	0.967	1.126
62505R	-	1 1/2"	-	50	3.386	0.967	1.126
62506	2"	2"	-	25	4.213	1.185	1.386
62507	2 1/2"	2 1/2"	-	25	4.882	1.228	1.098
62508	3"	3"	-	20	5.276	1.220	1.244
62509	3 1/2"	3 1/2"	-	10	5.750	1.250	1.275
62510	4"	4"	-	10	6.591	1.154	1.114





RIGID STRAP - ONE HOLE - STEEL






APPLICATION: Used to support rigid conduit or IMC where greater load bearing is required.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62000	3/8"	100	1000	1.673	0.626	0.701
62001	1/2"	100	1000	1.949	0.634	0.933
62002	3/4"	50	500	2.213	0.732	1.102
62003	1"	25	250	2.657	0.878	1.264
62004	1 - 1/4"	-	50	3.031	0.866	1.626
62005	1 - 1/2"	-	25	3.681	1.008	1.953
62006	2"	-	25	4.141	1.189	2.248
62027	2 - 1/2"	-	50	5.012	1.173	2.602
62028	3"	-	25	5.374	1.215	3.291
62029	3 - 1/2"	-	25	6.390	1.254	4.248
62030	4"	-	25	6.850	1.157	4.177

c UL us
E331642

RIGID STRAP - TWO HOLES - STEEL





APPLICATION: Used to support rigid conduit or IMC where greater load bearing is required.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62100	3/8"	100	1000	2.008	0.551	0.618
62101	1/2"	100	1000	2.551	0.504	0.874
62102	3/4"	50	500	2.898	0.567	1.118
62103	1"	25	250	3.453	0.638	1.331
62104	1 1/4"	25	250	4.268	0.866	1.673
62105	1 1/2"	-	50	4.760	0.941	1.984
62106	2"	-	50	5.079	1.000	2.295
62127	2 1/2"	-	25	6.106	1.004	2.969
62128	3"	-	25	6.772	1.004	3.539
62129	3 1/2"	-	25	7.425	1.004	4.110
62130	4"	-	25	9.366	1.016	4.508

c UL us
E331642


PIPE HANGERS WITH FORMED THREAD IN ONE END OF THE HANGER, NUT NOT REQUIRED PLATED STEEL

APPLICATION: Use to secure and suspend conduit from overhead supports. Indoors or outdoors.

c UL us
E331642

CATALOG NUMBER	TRADE SIZE		INNER CARTON	MASTER CARTON	L×W×H		
	RIGID	EMT			A	B	C
62501S	3/8" x 1/2"	1/2"	-	-	1.875	0.99	0.75
62502S	3/4"	3/4"	-	-	2.175	1.26	0.875
62503S	1"	1"	-	-	2.37	1.295	0.875
62504S	-	1 1/4"	-	-	3.175	1.965	0.875
62505S	1 1/4"	1 1/2"	-	-	3.255	1.875	0.875
62506S	1 1/2"	-	-	-	3.78	2.22	1.065
62507S	2"	2"	-	-	4.1	2.45	1.21






SINGLE PIECE STRUT CLAMP FOR CONDUIT - STEEL

APPLICATION: Use to secure and suspend conduit from overhead supports. Indoors or outdoors.

c UL us
E331642

CATALOG NUMBER	FOR EMT	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
64561	1/2" EMT	-	-	1.870	0.748	1.339
64562	3/4" EMT, 1/2" Rigid/Pipe	-	-	2.126	0.748	1.378
64563	1" EMT, 3/4" Rigid/Pipe	-	-	2.244	0.748	1.377
64564	1 1/4" EMT, 1" Rigid/Pipe	-	-	2.480	0.748	1.181






SINGLE PIECE STRUT CLAMP FOR CABLE/CONDUIT WITH BOOT - STEEL

APPLICATION: Use to secure and suspend conduit from overhead supports. Indoors or outdoors.

c UL us
E331642


CATALOG NUMBER	TRADE SIZE	L×W×H		
		A	B	C
64560B	0.1"-0.63" OD, 3/8" RGD	1.551	0.748	1.220
64561B	0.34"-0.71" OD,1/2" EMT	1.870	0.748	1.339
64562B	0.57"-0.92" OD, 3/4" EMT, 1/2" Rigid/Pipe	2.126	0.748	1.378
64563B	0.72"-1.16" OD, 1" EMT, 3/4" Rigid/Pipe	2.245	0.748	1.378
64564B	1"-1.51" OD,11/4"EMT,1"Rigid/Pipe	2.480	0.748	1.181
64565B	1.25"-1.74" OD, 11/2" EMT, 1 1/4" Rigid/Pipe	2.776	0.748	1.201
64566B	1.74"-2.2" OD, 2" EMT, 1 1/2" Rigid/Pipe	3.287	0.748	1.201
64567B	2"-2.38" OD, 2" Rigid/Pipe	3.465	0.748	0.827
64568B	2.38"-2.88" OD, 21/2" EMT, 2 1/2" Rigid/Pipe	3.996	0.748	0.748
64569B	2.72"-3.5" OD, 3" EMT, 3" Rigid/Pipe	4.567	0.748	0.748
64570B	3.25"-4" OD, 31/2" EMT, 3 1/2" Rigid/Pipe	5.118	0.748	0.748
64571B	3.85"-4.5" OD, 4" EMT, 4" Rigid/Pipe	5.669	0.748	0.748





J-CLAMP FOR RIGID CONDUIT, IMC AND EMT / MALLEABLE IRON / STEEL





APPLICATION: Used to attach rigid conduit, IMC, or EMT to steel structures.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B	C	D
23011	1/2"	-	-	2.972	1591	1.307	1.811
23012	3/4"	-	-	3.189	1.827	1.429	1.965
23013	1" - 1 1/4"	-	-	4.146	2.693	1.787	2.665
23014	1 1/2"-2"	-	-	5.291	3.602	2.205	3.543
23015	2 1/2"-3"	-	-	6.839	4.831	2.874	4.906
23016	3 1/2"- 4"	-	-	8.047	5.839	3.248	5.76

c UL us
E331642

RIGID STRAPS SNAP - ON TYPE - ONE HOLE - MALLEABLE IRON



APPLICATION: Used to support rigid conduit or IMC to mounting surface.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
62020M	3/8"	-	-
62021M	1/2"	-	-
62022M	3/4"	-	-
62023M	1"	-	-
62024M	1 1/4"	-	-
62025M	1 1/2"	-	-
62026M	2"	-	-
62027M	2 1/2"	-	-
62028M	3"	-	-
62029M	3 1/2"	-	-
62030M	4"	-	-
62031M	5"	-	-
62032M	6"	-	-

c UL us
E331642

3/8" only use in the US

RIGID CLAMP BACKS - MALLEABLE IRON



APPLICATION: Used with one hole straps to support rigid conduit or IMC.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
62021C	1/2"	-	-
62022C	3/4"	-	-
62023C	1"	-	-
62024C	1 1/4"	-	-
62025C	1 1/2"	-	-
62026C	2"	-	-
62027C	2 1/2"	-	-
62028C	3"	-	-
62029C	3 1/2"	-	-
62030C	4"	-	-
62031C	5"	-	-
62032C	6"	-	-

c UL us
E331642

CONDUIT SUPPORTS ALUMINUM & MALLEABLE IRON

APPLICATION: Used to support and secure rigid conduit, IMC, or EMT to a mounting surface.

c UL us
E331642

CATALOG NUMBER	TRADE SIZE		INNER CARTON	MASTER CARTON
23001	2"	1/2"X10" Threaded Rod	-	-
23001L	2"	Lag Screw	-	-
23001U	2"	None	-	-
23002	2 1/2"	1/2"X10" Threaded Rod	-	-
23002L	2 1/2"	Lag Screw	-	-
23002U	2 1/2"	None	-	-
23003	3"	5/8"X14" Threaded Rod	-	-
23003U	3"	None	-	-
23004	3 1/2"	5/8"X14" Threaded Rod	-	-
23004U	3 1/2"	None	-	-
23005	4"	5/8"X14" Threaded Rod	-	-
23005U	4"	None	-	-




INSERT PLUGS / STEEL / IRON

APPLICATION: Safely seal off unused hubs in metallic outlet boxes.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
23021	1/2"	-	-	0.815	0.618
23022	3/4"	-	-	1.028	0.622
23023	1"	-	-	1.283	0.768
23024	1 1/4"	-	-	1.630	0.768
23025	1 1/2"	-	-	1.866	0.874
23026	2"	-	-	2.343	0.768
23027	2 1/2"	-	-	2.827	1.150
23028	3"	-	-	3.453	1.193
23029	3 1/2"	-	-	3.957	1.189
23030	4"	-	-	4.453	1.339








UNIVERSAL STRAP - STEEL








APPLICATION: Use to connect two lengths of EMT&RIGID conduit together in a dry location.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62225	1/2" RGD&EMT	-	-	2.991	0.56
62226	3/4" RGD&EMT	-	-	3.442	0.652

c UL us
E331642

UNIVERSAL STRAP - STEEL








APPLICATION: Use to connect two lengths of EMT&RIGID conduit together in a dry location.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62021RE	1/2" RGD&EMT	-	-	1.729	0.83	0.66
62022RE	3/4" RGD&EMT	-	-	2.095	1.056	0.75

c UL us
E331642

ONE HOLE STRAP(SPEED THREAD) - EMT








APPLICATION: Use to connect two lengths of EMT conduit together in a dry location.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62021S	1/2"	-	-	1.475	0.668	0.543
62022S	3/4"	-	-	1.811	0.886	0.625

c UL us
E331642

ONE HOLE STRAP(SPEED THREAD) - RGD







APPLICATION: Use to join RGD conduit to flexible metallic conduit in a dry or wet location. Outdoors or Indoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62021RS	1/2"	-	-	1.791	0.810	0.626
62022RS	3/4"	-	-	2.116	1.025	0.748

c UL us
E331642


CONDUIT LOCKNUTS - ZINC DIE CAST

APPLICATION: Used to terminate fittings, threaded rigid conduit or IMC to enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
82201	1/2"	200	2000	1.087	0.122
82202	3/4"	100	1000	1358	0.142
82203	1"	100	1000	1.661	0.157
82204	1 1/4"	50	500	2.047	0.157
82205	1 1/2"	50	500	2.366	0.181
82206	2"	50	200	2.929	0.187
82207	2 1/2"	25	100	3.449	0.248
82208	3"	25	100	4.189	0.232
82209	3 1/2"	10	40	4.646	0.283
82210	4"	10	40	5.146	0.240






CONDUIT LOCKNUTS - STEEL

APPLICATION: Used to terminate fittings, threaded rigid conduit or IMC to enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62201	1/2"	200	2000	1.134	0.106
62202	3/4"	100	1000	1.390	0.118
62203	1"	100	1000	1.709	0.154
62204	1 1/4"	50	500	2.059	0.154
62205	1 1/2"	50	500	2.358	0.154
62206	2"	50	200	2.858	0.157
62207	2 1/2"	25	100	3.429	0.197
62208	3"	25	100	4.110	0.197
62209	3 1/2"	10	40	4.693	0.209
62210	4"	10	40	5.256	0.217
62211	5"	-	25	6.496	0.433
62212	6"	-	25	7.795	0.433






STEEL SEALING LOCKNUTS WITH PLASTIC SEAL


APPLICATION: Used to terminate fittings, threaded rigid conduit or IMC to enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
82201-A	1/2"	100	1000	1.134	0.260
82202-A	3/4"	100	1000	1.390	0.270
82203-A	1"	100	1000	1.709	0.280
82204-A	1 1/4"	50	500	2.059	0.320
82205-A	1 1/2"	50	500	2.358	0.320
82206-A	2"	50	200	2.858	0.320
82207-A	2 1/2"	25	100	3.429	0.320
82208-A	3"	25	100	4.110	0.320
82209-A	3 1/2"	10	40	4.693	0.320
82210-A	4"	10	40	5.256	0.320






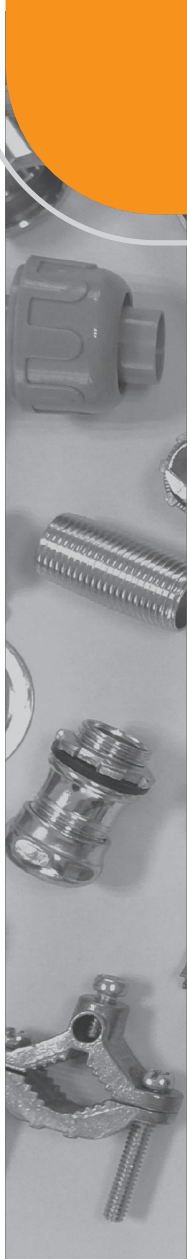

STEEL BONDING LOCKNUTS






APPLICATION: Used to terminate fittings, threaded rigid conduit or IMC to enclosure.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62201-G	1/2"	200	2000	1.150	0.110
62202-G	3/4"	100	1000	1.450	0.115
62203-G	1"	100	1000	1.750	0.140
62204-G	1 1/4"	50	500	2.100	0.140
62205-G	1 1/2"	50	500	2.400	0.140
62206-G	2"	50	200	2.950	0.140
62207-G	2 1/2"	25	100	3.550	0.185
62208-G	3"	25	100	3.550	0.190
62209-G	3 1/2"	10	40	4.200	0.190
62210-G	4"	10	40	4.750	0.190

INSULATED METALLIC GROUNDING BUSHINGS - ZINC DIE CAST






APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	CONDUIT LUG SIZE	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
88351-G	1/2"	#14 - #4	50	500	1.039	0.500	0.547
88352-G	3/4"	#14 - #4	50	500	1.268	0.500	0.732
88353-G	1"	#14 - #4	25	250	1.535	0.591	0.953
88354-G	1 1/4"	#14 - #4	25	250	1.866	0.606	1.323
88354-GS	1 1/4"	#14 - #1/0	25	250	1.866	0.606	1.323
88355-G	1 1/2"	#14 - #2	25	250	2.165	0.606	1.512
88355-GS	1 1/2"	#14 - #1/0	25	250	2.165	0.606	1.512
88356-G	2"	#14 - #2	10	100	2.665	0.591	1.890
88356-GS	2"	#14 - #1/0	10	100	2.665	0.591	1.890
88357-G	2 1/2"	#14 - #1/0	-	25	3.220	0.827	2.315
88358-G	3"	#14 - #1/0	-	25	3.850	0.827	2.917
88359-G	3 1/2"	#14 - #1/0	-	20	4.370	0.827	3.406
88360-G	4"	#14 - #1/0	-	20	4.843	0.827	3.862

METALLIC CONDUIT BUSHING - MALLEABLE IRON





APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.

c UL us
E358603


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88351M	1/2"	50	500	1.223	0.480
88352M	3/4"	50	500	1.498	0.490
88353M	1"	25	250	1.818	0.560
88354M	1 1/4"	25	250	2.423	0.610
88355M	1 1/2"	25	250	2.512	0.680
88356M	2"	10	100	3.053	0.680
88357M	2 1/2"	-	25	3.624	0.850
88358M	3"	-	25	4.172	0.910
88359M	3 1/2"	-	20	4.767	1.000
88360M	4"	-	20	5.321	1.060
88361M	5"	-	10	6.150	1.300
88362M	6"	-	10	7.190	1.300

CONDUIT SILL PLATES - ALUMINUM / ZINC

APPLICATION: Used in conjunction with sealing compound to protect service entrance cable and cover the hole where it enters the building.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B	C	D
89301	1/2" - 3/4"	-	-	0.812	2.593	2.421	0.218
89302	1"	-	-	1.25	3.00	2.50	0.218
89303	1 1/4"	-	-	1.65	3.812	2.625	0.218
89304	1 1/2"	-	-	1.75	3.562	3.75	0.218
89305	2"	-	-	2.312	4.093	4.125	0.218






INSULATED METALLIC GROUNDING BUSHINGS - MALLEABLE IRON

APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	CONDUIT LUG SIZE	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
88351-M	1/2"	#14 - #4	50	500	1.039	0.500	0.547
88352-M	3/4"	#14 - #4	50	500	1.268	0.500	0.732
88353-M	1"	#14 - #4	25	250	1.535	0.591	0.953
88354-M	1 1/4"	#14 - #4	25	250	1.866	0.606	1.323
88354-MS	1 1/4"	#14 - #1/0	25	250	1.866	0.606	1.323
88355-M	1 1/2"	#14 - #2	25	250	2.165	0.606	1.512
88355-MS	1 1/2"	#14 - #1/0	25	250	2.165	0.606	1.512
88356-M	2"	#14 - #2	10	100	2.665	0.591	1.890
88356-MS	2"	#14 - #1/0	10	100	2.665	0.591	1.890
88357-M	2 1/2"	#14 - #1/0	-	25	3.220	0.827	2.315
88358-M	3"	#14 - #1/0	-	25	3.850	0.827	2.917
88359-M	3 1/2"	#14 - #1/0	-	20	4.370	0.827	3.406
88360-M	4"	#14 - #1/0	-	20	4.843	0.827	3.862






METALLIC CONDUIT BUSHING INSUALTING - MALLEABLE IRON

APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.

c UL us
E315256


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88351MS	1/2"	50	500	1.223	0.480
88352MS	3/4"	50	500	1.498	0.490
88353MS	1"	25	250	1.818	0.560
88354MS	1 1/4"	25	250	2.423	0.610
88355MS	1 1/2"	25	250	2.512	0.680
88356MS	2"	10	100	3.053	0.680
88357MS	2 1/2"	-	25	3.624	0.850
88358MS	3"	-	25	4.172	0.910
88359MS	3 1/2"	-	20	4.767	1.000
88360MS	4"	-	20	5.321	1.060
88361MS	5"	-	10	6.150	1.300
88362MS	6"	-	10	7.190	1.300





RIGID COMPRESSION CONNECTORS - STEEL






APPLICATION: Used to connect threadless rigid conduit or IMC to a steel box or other enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
66501	1/2"	25	100	1.373	0.505	1.218
66502	3/4"	10	100	1.435	0.533	1.460
66503	1"	5	50	1.718	0.668	1.720
66504	1-1/4"	-	10	1.925	0.675	2.145
66505	1-1/2"	-	10	2.025	0.715	2.363
66506	2"	-	5	2.015	0.715	2.885
66507	2 1/2"	-	2			
66508	3"	-	2			
66509	3 1/2"	-	1			
66510	4"	-	1			

c UL us
E315256

RIGID COMPRESSION COUPLINGS - STEEL






APPLICATION: Used to connect threadless rigid conduit or IMC conduit.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
66601	1/2"	25	250	1.825	1.218
66602	3/4"	10	100	1.973	1.460
66603	1"	5	50	2.109	1.720
66604	1-1/4"	-	10	2.385	2.145
66605	1-1/2"	-	10	2.520	2.363
66606	2"	-	5	2.395	2.885
66607	2 1/2"	-	2		
66608	3"	-	2		
66609	3 1/2"	-	1		
66610	4"	-	1		

c UL us
E315256

90° SHORT ELBOWS FOR RIGID CONDUIT AND IMC CONDUIT - ZINC DIE CAST






APPLICATION: Used to connect threaded rigid conduit or IMC to a steel box or other enclosure where a close radius is desired.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85066	1/2"	25	250	1.842	1.472	0.535
85067	3/4"	15	150	2.074	1.677	0.543

c UL us
E315256

BOX SPACERS - ZINC DIE CAST







APPLICATION: Used as a raceway between two enclosures.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85501	1/2"	50	500	1.118	0.905
85502	3/4"	25	250	1.118	1.177
85502L	3/4"	25	250	1.693	1.177
8550(12)L	1/2" to 3/4"	25	250	1.693	1.177

c UL us
E315256


OFFSET NIPPLE - ZINC DIE CAST

APPLICATION: Used to offset the axis of a raceway by 3/4.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85078	1/2"	10	100	2.440	0.915	0.705
85079	3/4"	10	100	2.602	1.125	0.635
85080	1"	10	100	2.720	1.398	0.717
85081	1 1/4"	5	50	2.920	1.835	0.780
85082	1 1/2"	5	50	3.020	2.047	0.780
85083	2"	2	20	3.120	2.590	0.750
85084	2 1/2"	-	10	4.045	3.320	0.745
85085	3"	-	4	4.545	3.860	0.705






OFFSET NIPPLE - WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used to offset the axis of a raceway by 3/4.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85078-A	1/2"	10	100	2.558	0.915	0.705
85079-A	3/4"	10	100	2.720	1.125	0.635
85080-A	1"	10	100	2.800	1.398	0.717
85081-A	1 1/4"	5	50	3.078	1.835	0.780
85082-A	1 1/2"	5	50	3.100	2.047	0.780
85083-A	2"	2	20	3.278	2.590	0.750






PULL ELBOWS - RIGID TO RIGID - ZINC DIE CAST

APPLICATION: Used to make a 90° connection with two runs of threaded rigid conduit, IMC or to enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85101	1/2"	10	100	1.311	0.992
85102	3/4"	5	50	1.385	1.260
85103	1"	-	25	1.961	1.516
85104	1 1/4"	-	20	2.303	1.900






PULL ELBOWS - RIGID TO BOX - ZINC DIE CAST

APPLICATION: Used to make a 90° connection with two runs of threaded rigid conduit, IMC or to enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85201	1/2"	10	100	1.311	0.992
85202	3/4"	5	50	1.385	1.260
85203	1"	-	25	1.961	1.516
85204	1 1/4"	-	20	2.303	1.900








REDUCING BUSHINGS - ZINC DIE CAST






APPLICATION: Used to reduce the entry size of threaded rigid conduit or IMC and allow joining conduits of two different sizes.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
85801	3/4" - 1/2"	50	500	0.625	1.011
85802	1" - 1/2"	25	250	0.712	1.271
85803	1" - 3/4"	25	250	0.712	1.271
85804	1 1/4" - 1/2"	-	25	0.820	1.470
85805	1 1/4" - 3/4"	-	25	0.820	1.470
85806	1 1/4" - 1"	-	25	0.820	1.470
85807	1 1/2" - 1/2"	-	25	0.850	1.700
85808	1 1/2" - 3/4"	-	25	0.850	1.700
85809	1 1/2" - 1"	-	25	0.850	1.700
85810	1 1/2" - 1 1/4"	-	20	0.850	1.700
85811	2" - 1/2"	-	20	0.970	2.230
85812	2" - 3/4"	-	20	0.970	2.230
85813	2" - 1"	-	20	0.970	2.230
85814	2" - 1 1/4"	-	20	0.970	2.230
85815	2" - 1 1/2"	-	10	0.970	2.230
85818	2 1/2" - 1"	-	10	1.200	2.826
85819	2 1/2" - 1 1/4"	-	10	1.200	2.826
85820	2 1/2" - 1 1/2"	-	10	1.200	2.826
85821	2 1/2" - 2"	-	10	1.200	2.826

c UL us
E315256

REDUCING BUSHINGS - STEEL





APPLICATION: Used to reduce the entry size of threaded rigid conduit or IMC and allow joining conduits of two different sizes.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B(MIN/MAX)
62521	1/2" - 3/8"	50	500	0.563	0.813/0.823
62522	3/4" - 1/2"	25	250	0.650	1.024/1.034
62523	1" - 1/2"	25	250	0.715	1.281/1.293
62524	1" - 3/4"	25	250	0.715	1.281/1.293
62525	1 1/4" - 1/2"	-	25	0.820	1.626/1.638
62526	1 1/4" - 3/4"	-	25	0.820	1.626/1.638
62527	1 1/4" - 1"	-	25	0.820	1.626/1.638
62528	1 1/2" - 1/2"	-	25	0.850	1.865/1.877
62529	1 1/2" - 3/4"	-	25	0.850	1.865/1.877
62530	1 1/2" - 1"	-	25	0.850	1.865/1.877
62531	1 1/2" - 1 1/4"	-	25	0.850	1.865/1.877
62532	2" - 1/2"	-	20	0.970	2.339/2.351
62533	2" - 3/4"	-	20	0.970	2.339/2.351
62534	2" - 1"	-	20	0.970	2.339/2.351
62535	2" - 1 1/4"	-	20	0.970	2.339/2.351
62536	2" - 1 1/2"	-	20	0.970	2.339/2.351
62537	2 1/2" - 1"	-	10	1.200	2.826/2.841
62538	2 1/2" - 1 1/4"	-	10	1.200	2.826/2.841
62539	2 1/2" - 1 1/2"	-	10	1.200	2.826/2.841
62540	2 1/2" - 2"	-	10	1.200	2.826/2.841
62541	3" - 1 1/4"	-	10	2.000	3.452/3.467
62542	3" - 1 1/2"	-	10	2.000	3.452/3.467
62543	3" - 2"	-	10	2.000	3.452/3.467
62544	3"- 2 1/2"	-	10	2.000	3.452/3.467
62545	3 1/2" - 1 1/2"	-	10	2.000	3.953/3.968
62546	3 1/2" - 2"	-	10	2.000	3.953/3.968
62547	3 1/2" - 2 1/2"	-	11	2.000	3.953/3.968
62548	3 1/2" - 3"	-	12	2.000	3.953/3.968
62549	4" - 2"	-	13	2.000	4.451/4.466
62550	4" - 2 1/2"	-	14	2.000	4.451/4.466
62551	4" - 3"	-	15	2.000	4.451/4.466
62552	4" - 3 1/2"	-	16	2.000	4.451/4.466

c UL us
E358603


CONDUIT NIPPLES - ZINC DIE CAST

APPLICATION: Used with locknut to serve as a short raceway between enclosures.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
87001	1/2"	100	1000	0.585	0.936
87001L	1/2"	100	1000	-	-
87002	3/4"	50	500	0.710	1.175
87002L	3/4"	25	250	-	-
87003	1"	25	250	0.848	1.395
87004	1 1/4"	25	250	0.865	1.743
87005	1 1/2"	25	100	0.905	2.117
87006	2"	10	40	0.941	2.519
87007	2 1/2"	10	40	1.417	3.224
87008	3"	10	40	1.472	3.827
87009	3 1/2"	10	40	1.437	4.272
87010	4"	5	20	1.441	4.803






CONDUIT NIPPLES WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used with locknut to serve as a short raceway between enclosures.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
87001-A	1/2"	100	1000	0.644	0.936
87001L-A	1/2"	100	1000	-	-
87002-A	3/4"	50	500	0.770	1.175
87002L-A	3/4"	25	250	-	-
87003-A	1"	25	250	0.910	1.395
87004-A	1 - 1/4"	25	250	0.945	1.743
87005-A	1 - 1/2"	25	100	0.985	2.117
87006-A	2"	10	40	1.050	2.519
87007-A	2 - 1/2"	-	50	1.517	3.224
87008-A	3"	-	25	1.572	3.827
87009-A	3 - 1/2"	-	10	1.537	4.272
87010-A	4"	-	10	1.541	4.803






METALLIC CONDUIT BUSHING - ZINC DIE CAST


APPLICATION: Used with locknut to serve as a short raceway between enclosures.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88351	1/2"	100	1000	1.059	0.409
88352	3/4"	100	1000	1.276	0.409
88353	1"	50	500	1.535	0.496
88354	1 1/4"	25	250	1.888	0.539
88355	1 1/2"	10	100	2.122	0.618
88356	2"	25	100	2.636	0.512
88357	2 1/2"	-	50	3.228	0.622
88358	3"	-	25	3.823	0.827
88359	3 1/2"	-	10	4.359	0.846
88360	4"	-	10	4.945	0.846






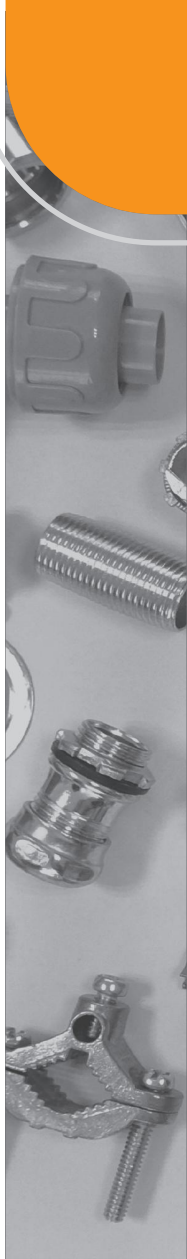

CAPPED METALLIC CONDUIT BUSHING - ZINC DIE CAST

APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88351-ST	1/2"	100	1000	1.059	0.409
88352-ST	3/4"	100	1000	1.276	0.409
88353-ST	1"	50	500	1.535	0.496
88354-ST	1 1/4"	25	250	1.888	0.539
88355-ST	1 1/2"	10	100	2.122	0.618
88356-ST	2"	25	100	2.636	0.512
88357-ST	2 1/2"	-	50	3.228	0.622
88358-ST	3"	-	25	3.823	0.827
88359-ST	3 1/2"	-	10	4.359	0.846
88360-ST	4"	-	10	4.945	0.846

c UL us
E315256

METALLIC CONDUIT BUSHING WITH PLASTIC THROAT - ZINC DIE CAST

APPLICATION: Used to terminate threaded rigid conduit or IMC to an enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88351-A	1/2"	100	1000	1.059	0.409
88352-A	3/4"	100	1000	1.276	0.409
88353-A	1"	50	500	1.535	0.496
88354-A	1 1/4"	25	250	1.888	0.539
88355-A	1 1/2"	10	100	2.122	0.618
88356-A	2"	25	100	2.636	0.512
88357-A	2 1/2"	-	50	3.228	0.622
88358-A	3"	-	25	3.823	0.827
88359-A	3 1/2"	-	10	4.359	0.846
88360-A	4"	-	10	4.945	0.846

c UL us
E315256

WATER TIGHT HUBS - ZINC DIE CAST

APPLICATION: Used to terminate rigid threaded conduit or IMC to enclosure.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88501	1/2"	25	250	1.406	1.406
88502	3/4"	10	100	1.539	1.661
88503	1"	10	100	1.752	1.949
88504	1 1/4"	2	20	1.689	2.409
88505	1 1/2"	2	20	1.713	2.693
88506	2"	2	20	1.831	3.201
88507	2 1/2"	-	2	2.594	3.685
88508	3"	-	2	2.614	4.385
88509	3 1/2"	-	1	2.440	4.880
88510	4"	-	1	2.559	5.437

c UL us
E315256


WATER TIGHT HUBS - BONDING SCREW - ZINC DIE CAST

APPLICATION: Used to terminate rigid threaded conduit or IMC to enclosure.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88501-G	1/2"	25	250	1.406	1.406
88502-G	3/4"	10	100	1.539	1.661
88503-G	1"	10	100	1.752	1.949
88504-G	1 1/4"	2	20	1.689	2.409
88505-G	1 1/2"	2	20	1.713	2.693
88506-G	2"	2	20	1.831	3.201
88507-G	2 1/2"	-	2	2.594	3.685
88508-G	3"	-	2	2.614	4.385
88509-G	3 1/2"	-	1	2.440	4.880
88510-G	4"	-	1	2.559	5.437






CONNECTORS FOR RIGID & IMC CONDUIT - SET SCREW TYPE - ZINC DIE CAST

APPLICATION: Used to connect threadless rigid conduit or IMC to a steel box or other enclosure.

c UL us
1/2"-1"
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88601/35-1	1/2"	50	500	1.299	1.063	0.382
88602/35-2	3/4"	25	250	1.492	1.338	0.437
88603/35-3	1"	20	200	1.736	1.602	0.559






COUPLINGS FOR RIGID & IMC CONDUIT SET SCREW TYPE - ZINC DIE CAST

APPLICATION: Used to connect threadless rigid conduit or IMC to a steel box or other enclosure.

c UL us
1/2"-1"
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88701/36-1	1/2"	25	250	1.760	1.071
88702/36-2	3/4"	20	200	2.039	1.339
88703/36-3	1"	20	200	2.260	1.587








RIGID COUPLINGS - STEEL






APPLICATION: Used to connect two lengths of rigid threaded conduit or IMC, when neither conduit can be turned.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
91201	1/2"	25	250	1.625	1.010
91202	3/4"	25	250	1.640	1.250
91203	1"	-	50	1.968	1.530
91204	1 1/4"	-	25	2.031	1.870
91205	1 1/2"	-	25	2.062	2.160
91206	2"	-	20	2.125	2.650
91207	2 1/2"	-	12	3.187	3.250
91208	3"	-	12	3.312	3.870
91209	3 1/2"	-	10	3.406	4.500
91210	4"	-	10	3.515	4.880
91211	5"	-	1	3.953	6.000
91212	6"	-	1	4.250	7.200

c UL us
E365589

IMC COUPLINGS - STEEL






APPLICATION: Used to connect two lengths of rigid threaded conduit or IMC, when neither conduit can be turned.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
91201	1/2"	25	250	1.625	1.010
91202	3/4"	25	250	1.640	1.250
91203	1"	-	50	1.968	1.530
91204	1 1/4"	-	25	2.031	1.870
91205	1 1/2"	-	25	2.062	2.160
91206	2"	-	20	2.125	2.650
91207	2 1/2"	-	12	3.187	3.250
91208	3"	-	12	3.312	3.870
91209	3 1/2"	-	10	3.406	4.500
91210	4"	-	10	3.515	4.880

UL
E365588

RIGID COUPLINGS THREE PIECE - MALLEABLE IRON





APPLICATION: Used to connect two lengths of rigid threaded conduit or IMC, when neither conduit can be turned.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
851/AN249	1/2"	20	200	1.430	1.360
852/AN250	3/4"	10	100	1.630	1.580
853/AN251	1"	5	50	1.810	1.890
854/AN252	1 1/4"	-	50	2.190	2.380
855/AN253	1 1/2"	-	50	2.310	2.830
856/AN254	2"	-	20	2.440	3.290
857/AN255	2 1/2"	-	12	2.520	4.030
858/AN256	3"	-	12	2.580	4.620
859/AN257	3 1/2"	-	10	2.650	5.350
860/AN258	4"	-	6	3.420	5.870

c UL us
E315256

RIGID METAL CONDUIT - STEEL

APPLICATION: RIGID CONDUIT.

c UL us
E365589

CATALOG NUMBER	TRADE SIZE	OUTSIDE (MM)	THICKNESS (MM)
98201	1/2"	21.34	2.64
98202	3/4"	26.67	2.72
98203	1"	33.4	3.2
98204	1 1/4"	42.16	3.38
98205	1 1/2"	48.26	3.51
98206	2"	60.33	3.71
98207	2 1/2"	73.03	4.9
98208	3"	88.9	5.21
98209	3 1/2"	101.6	5.46
98210	4"	114.3	5.72
98211	5"	-	-
98212	6"	-	-




RIGID CONDUIT STANDARD RADIUS ELBOWS 45° - STEEL

APPLICATION: Use to allow a 45° change of direction in a run of Rigid or IMC conduit. Indoors or outdoors.

c UL us
E365589

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A(MIN)	R
90301	1/2"	-	50	1.500	4.000
90302	3/4"	-	25	1.500	4.500
90303	1"	-	20	1.875	5.750
90304	1 1/4"	-	10	2.000	7.250
90305	1 1/2"	-	8	2.000	8.250
90306	2"	-	6	2.000	9.500
90307	2 1/2"	-	1	3.000	10.500
90308	3"	-	1	3.125	13.000
90309	3 1/2"	-	1	3.250	15.000
90310	4"	-	1	3.375	16.000
90311	5"	-	1	3.625	24.000
90312	6"	-	1	3.750	30.000






RIGID CONDUIT STANDARD RADIUS ELBOWS 90° - STEEL

APPLICATION: Use to allow a 90° change of direction in a run of Rigid or IMC conduit. Indoors or outdoors.

c UL us
E365589

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A(MIN)	R
90201	1/2"	-	50	1.500	4.000
90202	3/4"	-	25	1.500	4.500
90203	1"	-	20	1.875	5.750
90204	1 1/4"	-	10	2.000	7.250
90205	1 1/2"	-	8	2.000	8.250
90206	2"	-	10	2.000	9.500
90207	2 1/2"	-	-	3.000	10.500
90208	3"	-	-	3.125	13.000
90209	3 1/2"	-	-	3.250	15.000
90210	4"	-	-	3.375	16.000
90211	5"	-	-	3.625	24.000
90212	6"	-	-	3.750	30.000







INTERMEDIATE METAL CONDUIT - IMC - STEEL




APPLICATION: IMC CONDUIT.

CATALOG NUMBER	TRADE SIZE	OUTSIDE (MM)	THICKNESS (MM)
98301	1/2"	20.7	1.98
98302	3/4"	26.1	2.1
98303	1"	32.8	2.35
98304	1 1/4"	41.6	2.42
98305	1 1/2"	47.8	2.54
98306	2"	59.9	2.67
98307	2 1/2"	72.6	3.81
98308	3"	88.3	3.81
98309	3 1/2"	100.9	3.81
98310	4"	113.4	3.81

E365588

IMC CONDUIT STANDARD RADIUS ELBOWS 45° - STEEL






APPLICATION: Use to allow a 45° change of direction in a run of Rigid or IMC conduit. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A(MIN)	R
90501	1/2"	-	150	1.500	4.000
90502	3/4"	-	100	1.500	4.500
90503	1"	-	50	1.875	5.750
90504	1 1/4"	-	30	2.000	7.250
90505	1 1/2"	-	20	2.000	8.250
90506	2"	-	8	2.000	9.500
90507	2 1/2"	-	1	3.000	10.500
90508	3"	-	1	3.125	13.000
90509	3 1/2"	-	1	3.250	15.000
90510	4"	-	1	3.375	16.000

E365588

IMC CONDUIT STANDARD RADIUS ELBOWS 90° - STEEL





APPLICATION: Use to allow a 90° change of direction in a run of Rigid or IMC conduit. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A(MIN)	R
90401	1/2"	-	50	1.500	4.000
90402	3/4"	-	50	1.500	4.500
90403	1"	-	20	1.875	5.750
90404	1 1/4"	-	10	2.000	7.250
90405	1 1/2"	-	8	2.000	8.250
90406	2"	-	8	2.000	9.500
90407	2 1/2"	-	1	3.000	10.500
90408	3"	-	1	3.125	13.000
90409	3 1/2"	-	1	3.250	15.000
90410	4"	-	1	3.375	16.000

E365588

RIGID CONDUIT NIPPLES - STEEL

E365589

APPLICATION: Use to connect two steel outlet boxes or other metal enclosures;use to extend a length of threaded Rigid or IMC conduit. Indoors or outdoors.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
94104	1/2"- Close	25	250
94105	1/2" - 1 1/2"	-	25
94106	1/2" - 2"	-	25
94107	1/2" - 2 1/2"	-	25
94108	1/2" - 3"	-	25
94109	1/2" - 3 1/2"	-	25
94110	1/2" - 4"	-	25
94111	1/2" - 5"	-	25
94112	1/2" - 5 1/2"	-	25
94113	1/2" - 6"	-	25
94114	1/2" - 8"	-	20
94115	1/2" - 10"	-	20
94116	1/2" - 12"	-	20
94204	3/4"- Close	25	250
94206	3/4" - 2"	-	25
94207	3/4" - 2 1/2"	-	25
94208	3/4" - 3"	-	25
94209	3/4" - 3 1/2"	-	25
94210	3/4" - 4"	-	25
94211	3/4" - 5"	-	25
94212	3/4" - 5 1/2"	-	25
94213	3/4" - 6"	-	25
94214	3/4" - 8"	-	25
94215	3/4" - 10"	-	10
94216	3/4" - 12"	-	10
94304	1"- Close	25	250
94306	1"- 2"	-	25
94307	1" - 2 1/2"	-	25
94308	1" - 3"	-	25
94309	1" - 3 1/2"	-	25
94310	1" - 4"	-	25
94311	1" - 5"	-	25
94312	1" - 5 1/2"	-	25
94313	1" - 6"	-	25
94314	1" - 8"	-	20
94315	1" - 10"	-	1
94316	1" - 12"	-	1
94404	1 1/4"- Close	-	25
94406	1 1/4" - 2"	-	25
94407	1 1/4" - 2 1/2"	-	25
94408	1 1/4" - 3"	-	25
94409	1 1/4" - 3 1/2"	-	25
94410	1 1/4" - 4"	-	25
94411	1 1/4" - 5"	-	25
94412	1 1/4" - 5 1/2"	-	25
94413	1 1/4" - 6"	-	25
94414	1 1/4" - 8"	-	1
94415	1 1/4" - 10"	-	1
94416	1 1/4" - 12"	-	1
94504	1 1/2"- Close	-	25
94506	1 1/2" - 2"	-	25
94507	1 1/2" - 2 1/2"	-	25
94508	1 1/2" - 3"	-	25
94509	1 1/2" - 3 1/2"	-	25
94510	1 1/2 - 4"	-	25
94511	1 1/2 - 5"	-	25
94512	1 1/2" - 5 1/2"	-	25
94513	1 1/2" - 6"	-	25
94514	1 1/2" - 8"	-	1
94515	1 1/2" - 10"	-	1
94516	1 1/2" - 12"	-	1

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
94604	2"- Close	-	25
94607	2" - 2 1/2"	-	25
94608	2" - 3"	-	25
94609	2" - 3 1/2"	-	25
94610	2" - 4"	-	25
94611	2" - 5"	-	25
94612	2" - 5 1/2"	-	25
94613	2" - 6"	-	25
94613-1	2" - 7"	-	25
94614	2" - 8"	-	1
94615	2" - 10"	-	1
94616	2" - 12"	-	1
94704	2 1/2"- Close	-	25
94708	2 1/2" - 3"	-	25
94709	2 1/2"- 3 1/2"	-	25
94710	2 1/2" - 4"	-	25
94711	2 1/2" - 5"	-	25
94712	2 1/2"- 5 1/2"	-	25
94713	2 1/2" - 6"	-	25
94714	2 1/2"- 8"	-	1
94715	2 1/2"- 10"	-	1
94716	2 1/2"- 12"	-	1
94804	3"- Close	-	1
94808	3" - 3"	-	1
94809	3"- 3 1/2"	-	1
94810	3" - 4"	-	1
94811	3" - 5"	-	1
94812	3"- 5 1/2"	-	1
94813	3" - 6"	-	1
94814	3"- 8"	-	1
94815	3"- 10"	-	1
94816	3"- 12"	-	1
94904	3 1/2"- Close	-	1
94910	3 1/2" - 4"	-	1
94911	3 1/2" - 5"	-	1
94912	3 1/2"- 5 1/2"	-	1
94913	3 1/2" - 6"	-	1
94914	3 1/2" -8"	-	1
94915	3 1/2" - 10"	-	1
94916	3 1/2" - 12"	-	1
95004	4"- Close	-	1
95010	4" - 4"	-	1
95011	4" - 5"	-	1
95012	4"- 5 1/2"	-	1
95013	4" - 6"	-	1
95014	4" -8"	-	1
95015	4" - 10"	-	1
95016	4" - 12"	-	1
95104	5"- Close	-	1
95111	5" - 5"	-	1
95112	5"- 5 1/2"	-	1
95113	5" - 6"	-	1
95114	5" -8"	-	1
95115	5" - 10"	-	1
95116	5" - 12"	-	1
95204	6"- Close	-	1
95213	6" - 6"	-	1
95214	6" - 8"	-	1
95215	6" - 10"	-	1
95216	6" - 12"	-	1



IMC CONDUIT NIPPLES - STEEL

E365588


APPLICATION: Use to connect two steel outlet boxes or other metal enclosures;use to extend a length of threaded Rigid or IMC conduit. Indoors or outdoors.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
92104	1/2"- Close	-	25
92105	1/2" - 1 1/2"	-	25
92106	1/2" - 2"	-	25
92107	1/2" - 2 1/2"	-	25
92108	1/2" - 3"	-	25
92109	1/2" - 3 1/2"	-	25
92110	1/2" - 4"	-	25
92111	1/2" - 5"	-	25
92112	1/2" - 5 1/2"	-	25
92113	1/2" - 6"	-	25
92114	1/2" - 8"	-	1
92115	1/2" - 10"	-	1
92116	1/2" - 12"	-	1
92204	3/4"- Close	-	25
92206	3/4" - 2"	-	25
92207	3/4" - 2 1/2"	-	25
92208	3/4" - 3"	-	25
92209	3/4" - 3 1/2"	-	25
92210	3/4" - 4"	-	25
92211	3/4" - 5"	-	25
92212	3/4" - 5 1/2"	-	25
92213	3/4" - 6"	-	25
92214	3/4" - 8"	-	1
92215	3/4" - 10"	-	1
92216	3/4" - 12"	-	1
92304	1"- Close	-	25
92306	1"- 2"	-	25
92307	1" - 2 1/2"	-	25
92308	1" - 3"	-	25
92309	1" - 3 1/2"	-	25
92310	1" - 4"	-	25
92311	1" - 5"	-	25
92312	1" - 5 1/2"	-	25
92313	1" - 6"	-	25
92314	1" - 8"	-	1
92315	1" - 10"	-	1
92316	1" - 12"	-	1
92404	1 1/4"- Close	-	25
92406	1 1/4" - 2"	-	25
92407	1 1/4" - 2 1/2"	-	25
92408	1 1/4" - 3"	-	25
92409	1 1/4" - 3 1/2"	-	25
92410	1 1/4" - 4"	-	25
92411	1 1/4" - 5"	-	25
92412	1 1/4" - 5 1/2"	-	25
92413	1 1/4" - 6"	-	25
92414	1 1/4" - 8"	-	1
92415	1 1/4" - 10"	-	1
92416	1 1/4" - 12"	-	1
92504	1 1/2"- Close	-	25
92506	1 1/2" - 2"	-	25
92507	1 1/2" - 2 1/2"	-	25
92508	1 1/2" - 3"	-	25
92509	1 1/2" - 3 1/2"	-	25
92510	1 1/2 - 4"	-	25
92511	1 1/2 - 5"	-	25
92512	1 1/2" - 5 1/2"	-	25
92513	1 1/2" - 6"	-	25
92514	1 1/2" - 8"	-	1
92515	1 1/2" - 10"	-	1
92516	1 1/2" - 12"	-	1

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
92604	2"- Close	-	25
92607	2" - 2 1/2"	-	25
92608	2" - 3"	-	25
92609	2" - 3 1/2"	-	25
92610	2" - 4"	-	25
92611	2" - 5"	-	25
92612	2" - 5 1/2"	-	25
92613	2" - 6"	-	25
92614	2" - 8"	-	1
92615	2" - 10"	-	1
92616	2" - 12"	-	1
92704	2 1/2"- Close	-	1
92708	2 1/2" - 3"	-	1
92709	2 1/2"- 3 1/2"	-	1
92710	2 1/2" - 4"	-	1
92711	2 1/2" - 5"	-	1
92712	2 1/2"- 5 1/2"	-	1
92713	2 1/2" - 6"	-	1
92714	2 1/2"- 8"	-	1
92715	2 1/2"- 10"	-	1
92716	2 1/2"- 12"	-	1
92804	3"- Close	-	1
92808	3" - 3"	-	1
92809	3"- 3 1/2"	-	1
92810	3" - 4"	-	1
92811	3" - 5"	-	1
92812	3"- 5 1/2"	-	1
92813	3" - 6"	-	1
92814	3"- 8"	-	1
92815	3"- 10"	-	1
92816	3"- 12"	-	1
92904	3 1/2"- Close	-	1
92910	3 1/2" - 4"	-	1
92911	3 1/2" - 5"	-	1
92912	3 1/2"- 5 1/2"	-	1
92913	3 1/2" - 6"	-	1
92914	3 1/2" -8"	-	1
92915	3 1/2" - 10"	-	1
92916	3 1/2" - 12"	-	1
93204	4"- Close	-	1
93210	4" - 4"	-	1
93211	4" - 5"	-	1
93212	4"- 5 1/2"	-	1
93213	4" - 6"	-	1
93214	4" -8"	-	1
93215	4" - 10"	-	1
93216	4" - 12"	-	1

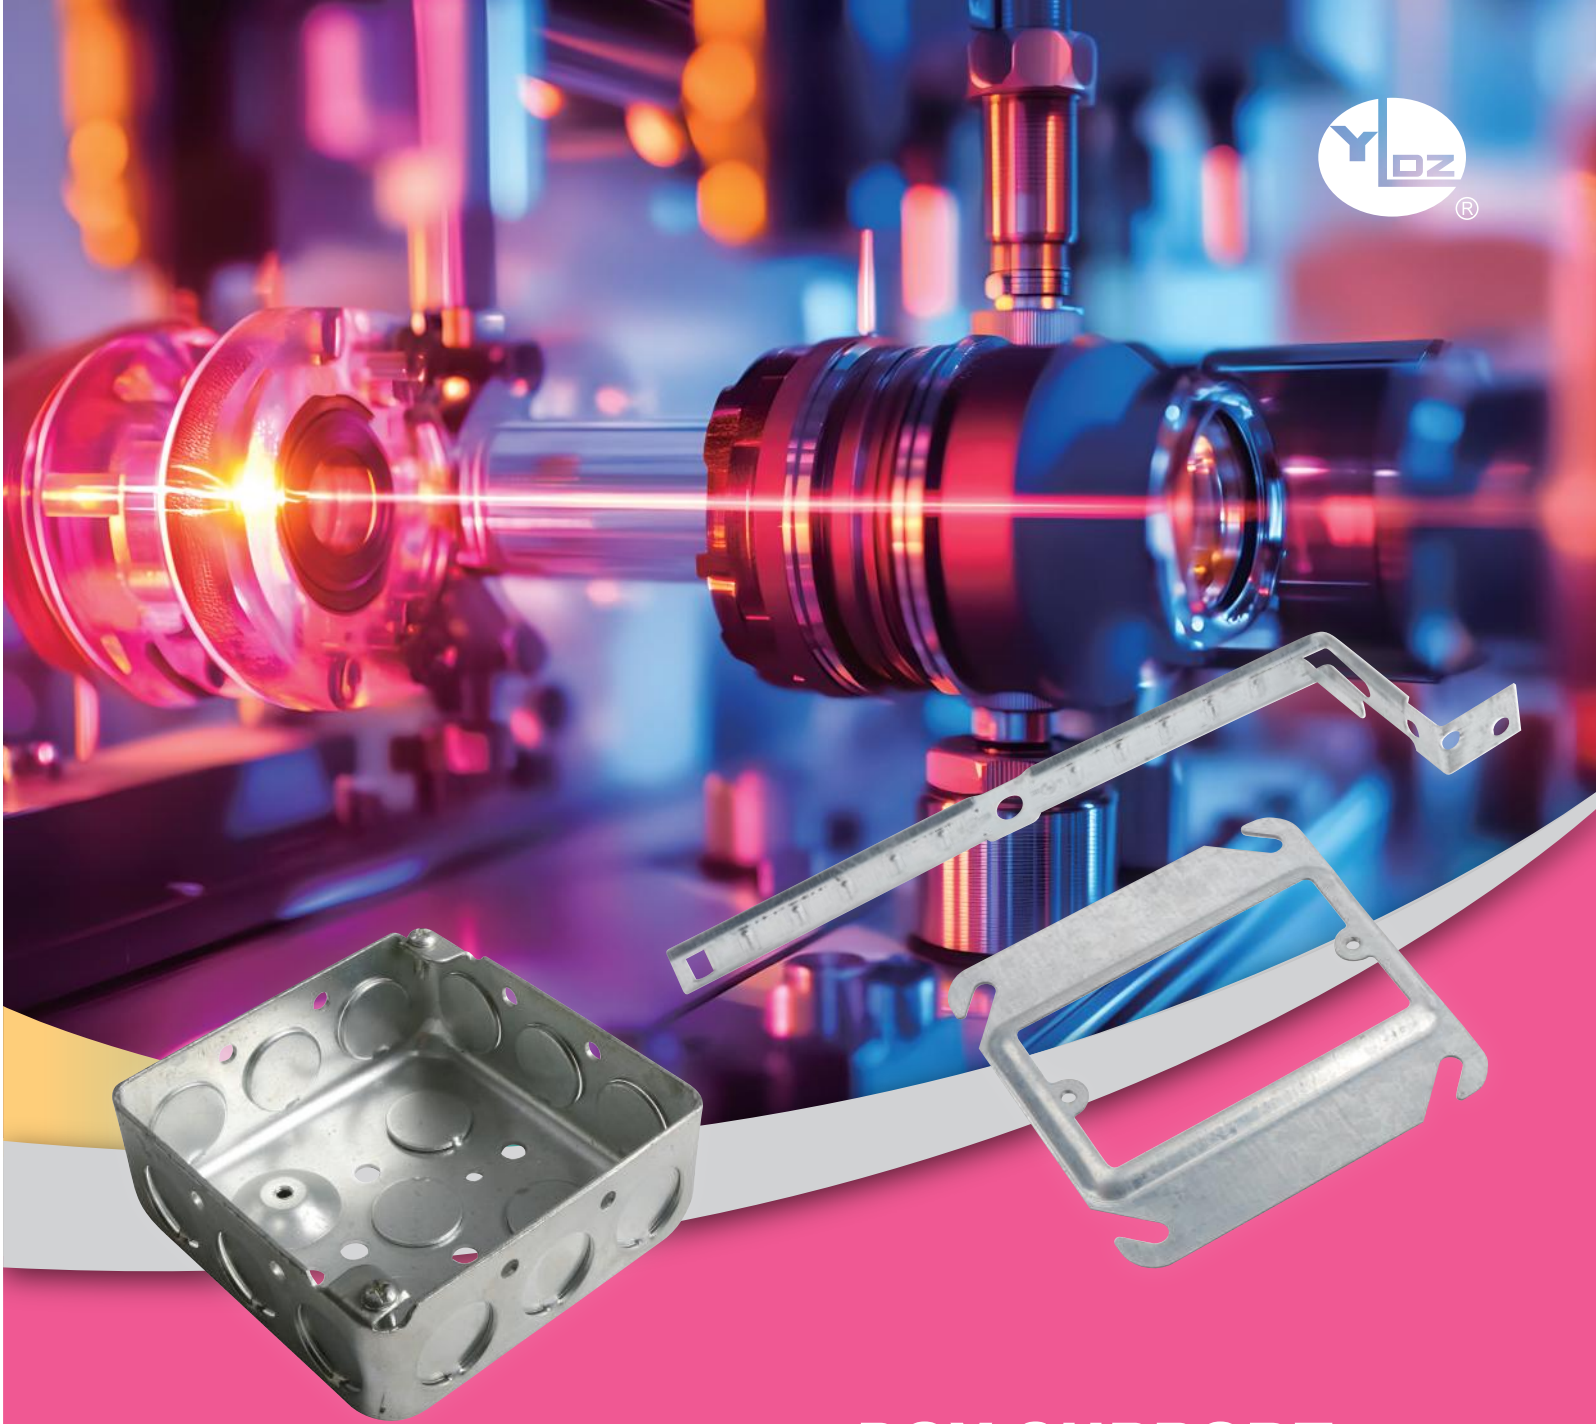

BOX SUPPORT

Pigtail.....59

Adjustable Plaster Ring.....60-62

Steel Box.....63-64

Box Support.....65-70

SOLID WIRE GROUNDING PIGTAIL



APPLICATION: Used to ground devices to steel boxes.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
11601	8" 12 AWG	100	1000
11601-1	7-1/2" 12 AWG	100	1000
11602	10" 12 AWG	50	500

STRANDED WIRE GROUNDING PIGTAIL WITH FLANGED TERMINAL



APPLICATION: Used to ground devices to steel boxes.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
11701-6-1/2	6-1/2" 12 AWG	100	1000
11701-8	8" 12 AWG	100	1000
11702-10	10" 12 AWG	50	500

GREEN GROUND SCREW



APPLICATION: Use to ground a wiring device to a steel outlet box.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
11801	#10-32 x 3/8"	100	1000

PANEL BRACKET TELESCOPING 16" BETWEEN STUD



APPLICATION: Panel bracket attaches to panel box providing a rigid surface to quickly and easily secure flexible conduit.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64559	-	-	100

4" SQUARE DEVICE RINGS FLAT OR DRAWN - STEEL



APPLICATION: 4" square blank flat covers are used to cover 4" square box wiring and provide a means for access when future conduit runs are required.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65936	Flat	-	50	4.130	4.130
65937	Raised 1/4"	-	50	4.130	4.130
65938	Raised 1/2"	-	50	4.130	4.130
65939	Raised 5/8"	-	50	4.130	4.130
65940	Raised 3/4"	-	50	4.130	4.130
65941	Raised 1"	-	50	4.130	4.130
65942	Raised 1 1/4"	-	50	4.130	4.130
65943	Raised 1 1/2"	-	50	4.130	4.130
65944	Raised 2"	-	50	4.130	4.130

c UL us
E360998

ADJUSTABLE PLASTER RING SINGLE GANG

APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL US
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64961	5/8" & 1 1/4"	-	50
64962	3/4" & 1 1/2"	-	50



ADJUSTABLE PLASTER RING 5/8" DOUBLE GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable double-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL US
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64963	5/8" & 1 1/2"	-	50



ADJUSTABLE PLASTER RING 3/4" TRIPLE GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable multi-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL US
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64964	3/4" & 1-1/2"	-	25



ADJUSTABLE PLASTER RING 3/4" ROUND GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable round device rings are used to mount switches, receptacles and other electrical devices.

c UL US
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64965	3/4" & 1-1/2"	-	25





4 11/6" SQUARE ADJUSTABLE PLASTER RING SINGLE GANG



APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64966	5/8" & 1 1/4"	-	50
64967	3/4" & 1 1/2"	-	50

c UL us
E360998

4 11/6" SQUARE ADJUSTABLE PLASTER RING 5/8" DOUBLE GANG EXTENDS TO 1-1/2"



APPLICATION: Adjustable double-gang device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64968	5/8" & 1 1/2"	-	50

c UL us
E360998

4 11/6" SQUARE ADJUSTABLE PLASTER RING 3/4" SQUARE TO ROUND EXTENDS TO 1-1/2"



APPLICATION: Adjustable round device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64969	3/4" & 1-1/2"	100	50

c UL us
E360998

5" SQUARE ADJUSTABLE PLASTER RING SINGLE GANG



APPLICATION: Adjustable double-gang device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64970	5/8" & 1 1/4"	-	50
64971	3/4" & 1 1/2"	-	50

c UL us
E360998

5" SQUARE ADJUSTABLE PLASTER RING 5/8" DOUBLE GANG EXTENDS TO 1-1/2"



APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64972	5/8" & 1 1/2"	-	50

c UL us
E360998

6" SQUARE ADJUSTABLE PLASTER RING SINGLE GANG

APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64973	5/8" & 1 1/4"	-	50
64974	3/4" & 1 1/2"	-	50



6" SQUARE ADJUSTABLE PLASTER RING 5/8" DOUBLE GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable double-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64975	5/8" & 1 1/2"	-	50



6" SQUARE ADJUSTABLE PLASTER RING 3/4" TRIPLE GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable multi-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64976	3/4" & 1-1/2"	-	25



ADJUSTABLE PLASTER RING 3/4" FOUR GANG EXTENDS TO 1-1/2"

APPLICATION: Adjustable multi-gang device rings are used to mount switches, receptacles and other electrical devices.

c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64977	3/4" & 1-1/2"	-	25




4" SQUARE ADJUSTABLE PLASTER RING 5/8" SINGLE GANG EXTENDS TO 1-1/4"

APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.


c UL us
E360998

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64978	5/8" & 1 1/4"	-	50





4 11/6" SQUARE ADJUSTABLE PLASTER RING 5/8" SINGLE GANG EXTENDS TO 1-1/4"



APPLICATION: Adjustable single-gang device rings are used to mount switches, receptacles and other electrical devices.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
64979	5/8" & 1 1/4"	-	-

c UL us
E360998

3" x 2" SWITCH BOXES – WITH CONDUIT KO'S 2 1/2" DEEP-STEE



APPLICATION: Adjustable BOX are used with electrical devices, connected with non-metallic cable, flexible metal cable and EMT.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
69500	8*1/2 &2 1/2"	-	50

c UL us
E360998

PRE-FAB BOX BRACKET WITH FAR-SIDE AND CABLE SUPPORT-STEEL





APPLICATION: Adjustable BOX are used with electrical devices, connected with non-metallic cable, flexible metal cable and EMT.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
69600	One-gang	-	50
69601	Two-gang		50

c UL us
E360998

SUPER DEEP 4"SQUARE WALL BOXES - STEEL





APPLICATION: Adjustable BOX are used with electrical devices, connected with non-metallic cable, flexible metal cable and EMT.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
65960(RD)	Deep:3 1/2"	-	50
65960CV(RD)	Deep:3 1/2"	-	50

c UL us
E360998

Suffix RD means red color.

4" SQUARE BOXES(11/2" DEEP) - STEEL


APPLICATION: Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

c UL us
E360998

CATALOG NUMBER	SIDE	BOTTOM	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
65946	12-1/2"	5-1/2"	-	50	4.160	4.160	1.610
65947	8-3/4"	3-1/2"&2-3/4"	-	50	4.160	4.160	1.610
65948	8-1/2"&4-3/4"	3-1/2"&2-3/4"	-	50	4.160	4.160	1.610
65949	8-1/2"&4-3/4"	2-1/2"&2-3/4"+GRD	-	50	4.160	4.160	1.610
65950	12-1/2"	4-1/2"+GRD	-	50	4.160	4.160	1.610
65951	8-1/2"&4-3/4"	-	-	50	4.160	4.160	1.610





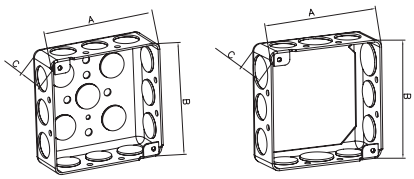

4" OCTAGONAL BOXES(11/2" DEEP) - STEEL


APPLICATION: Square boxes are used to bring power to a number of electrical devices where multiple conductor runs are split in two or more directions.

c UL us
E360998

CATALOG NUMBER	SIDE	BOTTOM	INNER CARTON	MASTER CARTON	L×W×H		
					A	B	C
63021	4-1/2"	5-1/2"	-	50	3.640	3.640	1.540
63022	4-3/4"	3-1/2"&2-3/4"	-	50	3.640	3.640	1.540
63023	2-1/2"&2-3/4"	3-1/2"&2-3/4"	-	50	3.640	3.640	1.540
63024	4-1/2"&4-3/4"	5-1/2"	-	50	3.640	3.640	1.540
63025	4-1/2"	4-1/2"+GRD	-	50	3.640	3.640	1.540
63026	4-1/2"	-	-	50	3.640	3.640	1.540
63027	2-1/2"&2-3/4"	-	-	50	3.640	3.640	1.540
63028	4-3/4"	-	-	50	3.640	3.640	1.540







4" X 2" SINGLE DEVICE HANDY BOXES AND EXTENSION RINGS 17/8" DEEP - STEEL


APPLICATION: Handy boxes, also referred to as utility boxes are used for switch boxes, convenience outlets or small junction boxes in exposed work applications.

c UL us
E360998

CATALOG NUMBER	SIDE	END	BOTTOM	INNER CARTON	MASTER CARTON	L×W×H		
						A	B	C
63101	6-1/2"	2-1/2"	3-1/2"	-	50	4.000	2.125	1.875
63102	4-3/4"	2-3/4"	2-3/4"	-	50	4.000	2.125	1.875
63103	4-1/2"&2-3/4"	2-3/4"	2-1/2"&1-3/4"	-	50	4.000	2.125	1.875
63104	4-1/2"&4-3/4"	2-1/2"&2-3/4"	2-1/2"&2-3/4"	-	50	4.000	2.125	1.875
63105	6-1/2"	2-1/2"	2-1/2"+GRD	-	50	4.000	2.125	1.875
63106	6-1/2"	2-1/2"	-	-	50	4.000	2.125	1.875






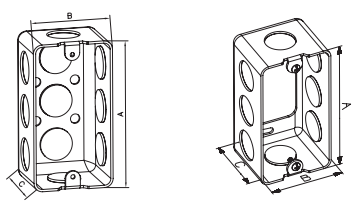



STEEL BOX BRACKET TO STUD - GALVANIZED STEEL




APPLICATION: Use to support electrical boxes mounted to metal or wood studs.Can be pre-assembled with boxes.

CATALOG NUMBER	WALL DEPTH	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62631	2-1/2" & 3-5/8"	-	50	4.504	5.626	3.484
62632	2-1/2" & 4"	-	50	-	-	-

c UL us
E358603

STEEL BOX BRACKET TO STUD - GALVANIZED STEEL




APPLICATION: Use to support electrical boxes mounted to metal or wood studs.Can be pre-assembled with boxes.

CATALOG NUMBER	WALL DEPTH	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62633	2 1/2" Thru 6"	-	50	4.504	5.626	5.846

c UL us
E358603

TELESCOPING SCREW GUN BOX BRACKET - GALVANIZED STEEL




APPLICATION: Telescoping box bracket allows easy installation of electrical boxes between wall studs, requires only a screw gun to install.

CATALOG NUMBER	BOX LENGTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62634	14-1/4" - 24-1/4"	-	50	17.690	1.500
62635	-	-	50	20.614	1.921
62636	1-1/2" -17-3/4"	-	50	-	-

c UL us
E358603

3 DEVICE RIGID BOX SUPPORT - GALVANIZED STEEL



APPLICATION: Secure multiple boxes using one bracket 16" supports up to 3 boxes.

CATALOG NUMBER	BOX DEPTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62637	1-1/2" & 2-1/8"	-	25	15.9050	5.0236


c UL us
E358603

4 DEVICE RIGID BOX SUPPORT - GALVANIZED STEEL

APPLICATION: Secure multiple boxes using one bracket 24" supports up to 4 boxes.

c UL us
E358603

CATALOG NUMBER	WALL DEPTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62638	1-1/2" & 2-1/8"	-	25	24.015	5.0236

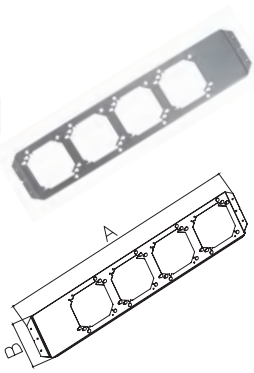


T-GRID BOX HANGER 24" SPAN - GALVANIZED STEEL

APPLICATION: Easily mounts 1-1/2" or 2-1/8" box to a T-grid.Allows electrical boxes to be quickly installed on T-grid.

c UL us
E358603

CATALOG NUMBER	WALL DEPTH	INNER CARTON	MASTER CARTON	L×W×H
				A
62639	-	-	50	28.000

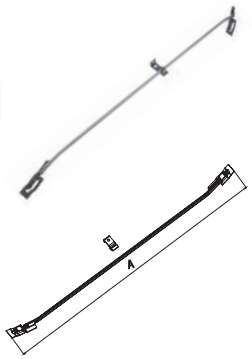


T-GRID BOX HANGER W / MOUNTING CLIP - HEAVY DUTY - GALVANIZED STEEL

APPLICATION: Easily mounts 1-1/2" deep box (break off tabs) or 2-1/8" deep box to a T-grid. Allows electrical boxes to be quickly installed on T-grid.

c UL us
E358603

CATALOG NUMBER	BOX DEPTH	LENGTH	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
62640	1-1/2" & 2-1/8"	24	-	25	24.000	2.000

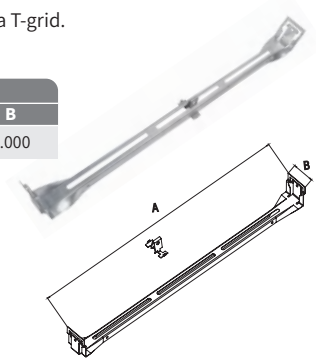


MC / NM STUD WALL CABLE SUPPORT - GALVANIZED STEEL

APPLICATION: Easily install and secure NM or MC cables to wood or metal studs.


c UL us
E331642

CATALOG NUMBER	BOX DEPTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62641	1-1/2" & 2-1/8"	-	100	8.050	0.630



STRUT CLAMP - STEEL






APPLICATION: Use for securing conduit to strut channel. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62901	1/2"	-	250	2.204	1.257
62902	3/4"	-	250	2.461	1.257
62903	1"	-	250	2.764	1.257
62904	1 1/4"	-	200	3.315	1.257
62905	1 1/2"	-	200	3.417	1.257
62906	2"	-	200	4.063	1.257
62907	2 1/2"	-	50	4.504	1.257
62908	3"	-	25	5.035	1.257
62909	3 1/2"	-	25	6.000	1.257
62910	4"	-	25	6.634	1.257

c UL us
E331642
3 1/2"excluding

GLIDER ELECTRICAL BOX ATTACHMENT - STEEL






APPLICATION: Attaches electrical boxes to the TSGB with a single screw, without tools and without need for disassembly.

CATALOG NUMBER	WALL DEPTH	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
64552	#10 Hole	-	-	1.791	2.028	1.634

c UL us
E358603

WMX CABLE HANGER - STEEL



APPLICATION: Bundle runs of MC or AC (refer to local authorities and NEC Article 310 for derating Aacity when flexible power cables are used).

CATALOG NUMBER	BOX LENGTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
64553	1 1/8" Dia	-	-	3.150	3.110
64554	1 3/4" Dia	-	-	4.528	4.921

c UL us
E331642

ELECTRICAL DROP WIRE SECURING CLIP - STEEL



APPLICATION: Use to help prevent sway of dedicated electrical drop wire/rod.

CATALOG NUMBER	BOX DEPTH	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
64555	#8 Wire	-	-	7.736	1.260

ADJUSTABLE FAR - SIDE BOX SUPPORT, BACK MOUNT - STEEL

APPLICATION: Provides far side electrical box support in various stud wall depths.

c UL us
E358603

CATALOG NUMBER	WALL DEPTH	L×W×H	
		A	B
64556	2-1/2", 3 1/2", 4", 6" Wall Depth	5.146	0.902




ADJUSTABLE FAR - SIDE BOX SUPPORT - STEEL

APPLICATION: Provides far side electrical box support in various stud wall depths.

c UL us
E358603

CATALOG NUMBER	WALL DEPTH	L×W×H	
		A	B
64557	2-1/2", 3 1/2", 4", Wall Depth	4.291	0.748




SCREW GUN BRACKET - STEEL

APPLICATION: an be pre-assembled by the contractor to allow for greater productivity at the job site.

c UL us
E358603

CATALOG NUMBER	BOX DEPTH	L×W×H	
		A	B
64573	16" Stud Spacing, 1-1/2", 2 1/8" Box Depth	20.236	2.000



HEAVY DUTY TELESCOPING BRACKET - STEEL

APPLICATION: Used to works with wood or metal studs to assemble with metal box.

c UL us
E358603

CATALOG NUMBER	BOX DEPTH	L×W×H	
		A	B
64558	Stud Spacing, 14 1/2" - 25" Box Size: 4" 4 11/16" 5"	14.961	7.283



BOX MOUNTING PLATE, 4", 4 11/16", 5" BOX - STEEL

APPLICATION: Used to works with wood or metal studs to assemble with metal box.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
64580	4";4 11/16; 5"	-	100	7.835	6.260	0.839





CABLE STAPLES FOR NON - METALLIC CABLES - STEEL






APPLICATION: Use to secure non-metallic sheathed, armored or SEU cable to wood surfaces. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
YL10-100	#14 to # 12-2	600	6000	0.996	0.728	0.102
YL10-500	#14 to # 10-3	400	4000	1.240	0.795	0.122
YL10-B	#14-2 to # 6-3	150	1500	1.507	1.381	0.137

E331642

EMT DRIVE STRAPS - STEEL






APPLICATION: To secure EMT conduit to a wood or masonry surface. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65601	1/2"	100	1000	1.961	1.085
65602	3/4"	100	1000	2.091	1.282
65603	1"	50	500	2.185	1.542

C UL US
E331642

STRAIN RELIEF CORD CONNECTORS - ZINC DIE CAST






APPLICATION: Indoor and outdoor use.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
81001	1/2"(.190 - .260)	25	250	1.300	0.960
81002	1/2"(.260 - .375)	25	250	1.300	0.960
81003	1/2"(.375 - .500)	25	250	1.300	0.960
81004	3/4"(.375 - .500)	25	250	1.320	1.200
81005	3/4"(.500 - .625)	25	250	1.320	1.200
81006	3/4"(.625 - .750)	25	250	1.320	1.200
81007	1"(.375 - .500)	25	250	1.580	1.510
81008	1"(.500 - .625)	10	100	1.580	1.510
81009	1"(.625 - .750)	10	100	1.580	1.510
81010	1"(.750 - .880)	10	100	1.580	1.510
81011	1"(.880 - .985)	-	-	1.580	1.510

C UL US
E358603

NON - METALLIC STRAIN RELIEF CORD CONNECTORS - NYLON





APPLICATION: Prevents cable pullout and controls arc of bend.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
35001	1/2"	25	250	1.792	1.030	0.600
35002	3/4"	15	150	2.250	1.270	0.600
36001	1/2" TO 3/4"	25	250	2.250	1.270	0.600

C UL US
E358603

BEAM CLAMP - STEEL

APPLICATION: Supports threaded rod, threaded brindle rings and electrical boxes.

c UL us
E331642

CATALOG NUMBER	JAW HOLES	JAW OPENING	INNER CARTON	MASTER CARTON
22001	10-24	13/16"	10	100
22002	1/4-20	13/16"	-	25
22003	3/8-16	13/16"	-	10
22004	15/16-18	7/8"	-	-
22005	3/8-16	11/8"	-	-
22006	3/8-16	7/8"	-	-
22007	1/2-13	31/32"	-	-
22008	1/2-13	13/16"	-	-



PERFORATED STRAP - IRON

APPLICATION: Securing or Hanging Pipes and Fixtures;Securing Pipe Joints and Connections.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
62301	GAVANIZED	-	10



CEILING BOX SUPPORT - CBSBARS - STEEL

APPLICATION: Used to installations where space and access may be limited.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62401	FOR CEILING BOX	-	50	11.024	0.520

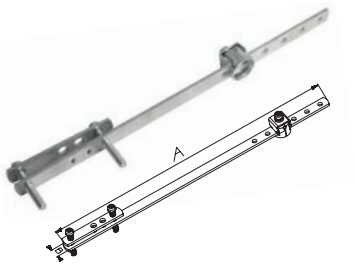

ROMEX AND SEU STRAPS - HEAVY GAUGE STEEL

APPLICATION: Secure pipe sizes 1-1/4" to 3".

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
62601	1 1/4" TO 3"	-	20	5.507	1.161

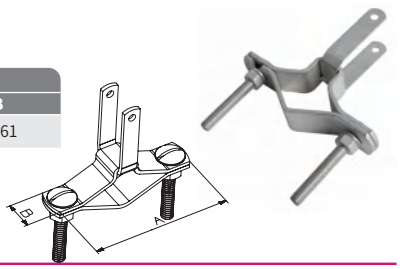

T BOX - MALLEABLE IRON

APPLICATION: Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
63701	1/2"	-	10	5.220	3.110
63702	3/4"	-	10	5.220	3.110
63703	1"	-	10	5.630	3.567





LIQUID TIGHT

Liquid Tight Connectors.....70-74

Air Whips.....74

Liquid-Tight Conduit.....75




LIQUID - TIGHT CONNECTORS - 90° ANGLE - ZINC DIE CAST

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85001	3/8"	10	100	2.402	2.204	0.511
85002	1/2"	10	100	2.433	2.153	0.511
85003	3/4"	10	100	2.717	2.519	0.563
85004	1"	5	50	3.425	2.885	0.720
85005	1-1/4"	2	20	3.976	3.220	0.838
85006	1-1/2"	2	20	4.122	3.700	0.708
85007	2"	1	10	4.701	4.184	0.680
85008	2-1/2"	-	1	6.189	5.149	1.043
85009	3"	-	1	7.087	6.133	0.964
85010	3-1/2"	-	1	7.450	6.715	1.100
85011	4"	-	1	8.531	7.405	1.027






LIQUID - TIGHT CONNECTORS - 90° ANGLE - INSULATION - ZINC DIE CAST

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85001-A	3/8"	10	100	2.402	2.244	0.551
85002-A	1/2"	10	100	2.433	2.193	0.551
85003-A	3/4"	10	100	2.717	2.559	0.603
85004-A	1"	5	50	3.425	2.925	0.760
85005-A	1-1/4"	2	20	3.976	3.260	0.878
85006-A	1-1/2"	2	20	4.122	3.740	0.748
85007-A	2"	1	10	4.701	4.224	0.720
85008-A	2-1/2"	-	1	6.189	5.189	1.083
85009-A	3"	-	1	7.087	6.173	1.004
85010-A	3-1/2"	-	1	7.450	6.715	1.100
85011-A	4"	-	1	8.531	7.445	1.067






90° LIQUID - TIGHT CONNECETORS - NYLON

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85001-P/P490	3/8"	10	100	2.840	0.500	2.030
85002-P/P491	1/2"	10	100	2.840	0.500	2.030
85003-P/P492	3/4"	10	100	3.250	0.500	2.330
85004-P/P493	1"	5	50	3.540	0.600	2.950
85005-P/P494	1-1/4"	2	20	4.750	0.760	5.200
85006-P/P495	1-1/2"	2	20	4.750	0.800	5.200
85007-P/P496	2"	1	10	5.420	0.860	5.800






LIQUID - TIGHT CONNECTORS - STRAIGHT - ZINC DIE CAST

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88115	3/8"	20	200	1.444	1.299	0.543
88116	1/2"	20	200	1.444	1.307	0.551
88117	3/4"	10	100	1.448	1.583	0.551
88118	1"	5	50	1.810	1.780	0.716
88119	1-1/4"	5	50	2.031	1.909	0.716
88120	1-1/2"	2	20	1.991	2.488	0.716
88121	2"	2	20	2.007	2.992	0.684
88122	2-1/2"	-	1	3.279	3.709	0.984
88123	3"	-	1	3.440	4.331	1.011
88124	3-1/2"	-	1	5.470	3.660	0.920
88125	4"	-	1	3.984	5.173	1.035

c UL us
E315256

LIQUID - TIGHT CONNECTORS - STRAIGHT WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88115-A	3/8"	20	200	1.484	1.299	0.583
88116-A	1/2"	20	200	1.484	1.307	0.591
88117-A	3/4"	10	100	1.488	1.583	0.591
88118-A	1"	5	50	1.850	1.780	0.756
88119-A	1-1/4"	5	50	2.071	1.909	0.756
88120-A	1-1/2"	2	20	2.031	2.488	0.756
88121-A	2"	2	20	2.047	2.992	0.724
88122-A	2-1/2"	-	1	3.319	3.709	1.024
88123-A	3"	-	1	3.480	4.331	1.051
88124-A	3-1/2"	-	1	5.550	3.660	0.920
88125-A	4"	-	1	4.024	5.173	1.075

c UL us
E315256

LIQUID - TIGHT CONNECTORS - NYLON

APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88115-P/P470	3/8"	20	200	1.180	0.550	1.420
88116-P/P471	1/2"	20	200	1.180	0.550	1.420
88117-P/P472	3/4"	10	100	1.200	0.640	1.690
88118-P/P473	1"	5	50	1.230	0.720	2.020
88119-P/P474	1-1/4"	-	50	2.440	0.760	2.400
88120-P/P475	1-1/2"	-	50	2.700	0.800	2.670
88121-P/P476	2"	-	20	2.990	0.850	3.280

c UL us
E315256

LIQUID - TIGHT CONNECTORS - 90° ANGLE - STEEL

c UL us
E315256

APPLICATION:
Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
490M	3/8"	10	100
491M	1/2"	10	100
492M	3/4"	10	100
493M	1"	5	50
494M	1 1/4"	2	20
495M	1 1/2"	2	20
496M	2"	2	20
497M	2 1/2"	-	-
498M	3"	-	-
499M	3 1/2"	-	-
500M	4"	-	-



LIQUID - TIGHT CONNECTORS - 90° ANGLE - INSULATION - STEEL

c UL us
E315256

APPLICATION:
Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
490S	3/8"	10	100
491S	1/2"	10	100
492S	3/4"	10	100
493S	1"	5	50
494S	1 1/4"	2	20
495S	1 1/2"	2	20
496S	2"	2	20
497S	2 1/2"	-	-
498S	3"	-	-
499S	3 1/2"	-	-
500S	4"	-	-



LIQUID - TIGHT CONNECTORS - STRAIGHT - STEEL

c UL us
E315256

APPLICATION:
Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
470M	3/8"	10	100
471M	1/2"	10	100
472M	3/4"	10	100
473M	1"	5	50
474M	1 1/4"	2	20
475M	1 1/2"	2	20
476M	2"	2	20
477M	2 1/2"	-	-
478M	3"	-	-
479M	3 1/2"	-	-
480M	4"	-	-



LIQUID - TIGHT CONNECTORS - STRAIGHT WITH INSULATED THROAT - STEEL

c UL us
E315256

APPLICATION:
Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
470S	3/8"	10	100
471S	1/2"	10	100
472S	3/4"	10	100
473S	1"	5	50
474S	1 1/4"	2	20
475S	1 1/2"	2	20
476S	2"	2	20
477S	2 1/2"	-	-
478S	3"	-	-
479S	3 1/2"	-	-
480S	4"	-	-





LIQUID - TIGHT CONNECTORS - 45° ANGLE - STEEL



APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
230M	3/8"	10	100
231M	1/2"	10	100
232M	3/4"	10	100
233M	1"	5	50
234M	1-1/4"	2	20
235M	1-1/2"	2	20
236M	2"	2	20
237M	2-1/2"	-	-
238M	3"	-	-
239M	3-1/2"	-	-
240M	4"	-	-

c UL us
E315256

LIQUID - TIGHT CONNECTORS - 45° ANGLE - INSULATION - STEEL




APPLICATION: Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
230S	3/8"	10	100
231S	1/2"	10	100
232S	3/4"	10	100
233S	1"	5	50
234S	1-1/4"	2	20
235S	1-1/2"	2	20
236S	2"	2	20
237S	2-1/2"	-	-
238S	3"	-	-
239S	3-1/2"	-	-
240S	4"	-	-

c UL us
E315256

AIR CONDITIONER WHIP





APPLICATION: Connection between outside air conditioning unit and electrical power source; typically used to connect compressor to AC disconnect box.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON
98802PW-4F	1/2"* 4 Feet	-	10
98803PW-4F	3/4"* 4 Feet	-	10
98802PW-6F	1/2" * 6 Feet	-	10
98803PW-6F	3/4"* 6 Feet	-	10
98802ZW-4F	1/2"* 4 Feet	-	10
98803ZW-4F	3/4"* 4 Feet	-	10
98802ZW-6F	1/2" * 6 Feet	-	10
98803ZW-6F	3/4"* 6 Feet	-	10

LIQUID - TIGHT COVERED STEEL FLEXIBLE CONDUIT

c UL us
E540069

CATALOG NUMBER	TRADE SIZE	INTERNAL DIAMETER Min/Max(MM)	EXTERNAL DIAMETER Min/Max(MM)
98701	3/8"	12.3/12.8	17.5/18.0
98702	1/2"	15.8/16.3	20.8/21.3
98703	3/4"	20.7/21.2	26.2/26.7
98704	1"	26.4/26.8	32.7/33.4
98705	1 - 1/4"	35.05/35.4	41.4/42.2
98706	1 - 1/2"	40.1/40.6	47.4/48.3
98707	2"	51.3/51.9	59.4/60.3
98708	2 - 1/2"	63.0/63.6	72.1/73.0
98709	3"	78.0/78.8	87.9/88.9
98710	3 - 1/2"	88.90-89.92	100.58-101.6
98711	4"	101.6/102.6	113.2/114.3



APPLICATION:
Liquid Tight Steel Flexible Conduit manufactured using galvanized steel is resistant to oil and grease. Helically wound flexible conduit is available with smooth wipe clean outer cover or PVC cover, this make them UV resistant and can be used for external use.

LIQUID - TIGHT PVC FLEXIBLE CONDUIT

APPLICATION: Use with straight or right angle connectors.May also be used with metallic connectors for liquid-tight conduit.

c UL us
E540070

CATALOG NUMBER	TRADE SIZE	INTERNAL DIAMETER Min/Max(MM)	EXTERNAL DIAMETER Min/Max(MM)
98801	3/8"	12.29-12.80	17.53-18.03
98802	1/2"	15.80-16.31	20.83-21.34
98803	3/4"	20.83-21.34	26.16-26.67
98804	1"	26.44-27.08	32.77-33.40
98805	1 - 1/4"	35.05-35.81	41.40-42.16
98806	1 - 1/2"	40.01-40.64	47.37-48.26
98807	2"	51.31-51.94	59.44-60.33




90° LIQUID - TIGHT CONNECTORS ZINC DIE CAST

APPLICATION: Use to connect flexible metallic or type B non-metallic conduit to a steel outlet box or other metal enclosure. Indoors or outdoors.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
06805	1/2"	10	100	2.470	1.520	0.521
06807	3/4"	10	100	2.761	1.695	0.521






LIQUID - TIGHT CONNECTORS ZINC DIE CAST

APPLICATION: Use to connect flexible metallic or type B non-metallic conduit to a steel outlet box or other metal enclosure. Indoors or outdoors.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
06305	1/2"	10	100	1.661	0.521	1.543
06307	3/4"	10	100	1.721	0.521	1.790







FLEX & NM & SE

Flex Connectors.....76-79
Galvanized Steel & Aluminum Flexible Conduit.....80
Cable Connectors.....81-82
Plastic Bushings.....83-84
Seu Strap.....85
Wedge Clamp.....86
Nail Plate.....87
Reducing Washers.....88
Service Entrance Connector.....89-90
Grounding.....91-92


FLEX CONNECTORS - SADDLE TYPE - ZINC DIE CAST

APPLICATION: Used to terminate armored or metal clad cables to an enclosure.

c UL us
E315258
3/8"-3/4"
E315256
1"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B(MIN)	B(MAX)
82018	3/8"	50	500	0.930	0.400	0.500
82019	1/2"	25	500	1.380	0.660	0.990
82020	3/4"	20	200	1.500	0.700	1.150
82021	1"	20	200	1.642	1.100	1.400






FLEX CONNECTORS - SADDLE TYPE - WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used to terminate armored or metal clad cables to an enclosure.

c UL us
E315258

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B(MIN)	B(MAX)
82018-A	3/8"	50	500	1.017	0.134	0.681






STRAP CONNECTOR - ALUMINUM

APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B	C(MIN)	C(MAX)
82071	1/2"	25	250	1.559	0.535	0.400	0.950
82073	1"	10	100	1.933	0.565	0.620	1.400
82074	1-1/4"	5	50	2.315	0.654	0.500	1.380
82076	2"	10	40	2.657	0.650	0.900	2.040






BX FLEX CONNECTOR - SET SCREW TYPE - ZINC DIE CAST

APPLICATION: Used to terminate steel or aluminum flexible metal conduit to an enclosure.

c UL us
E315256


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
82901	1/2"	25	250	1.496	0.42	1.182
82902	3/4"	20	200	1.543	0.472	1.153





FLEXIBLE METAL CONDUIT SQUEEZE CONNECTOR - ZINC DIE CAST





APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
82059	3/8"	50	500	1.146	0.512	1.141
82060	1/2"	25	250	1.437	0.492	1.370
82061	3/4"	25	250	1.575	0.476	1.574
82062	1"	10	100	1.760	0.571	1.866
82063	1-1/4"	10	100	1.874	0.587	2.145
82064	1-1/2"	5	50	2.008	0.610	2.519
82065	2"	10	40	2.087	0.606	3.011
82066	2-1/2"	-	10	2.854	0.866	3.866
82067	3"	-	10	2.236	0.866	4.354
82068	3-1/2"	-	1	3.840	0.902	4.788
82069	4"	-	1	4.055	0.902	5.303

c UL us
E315258
3/8"-3/4"

E315256
1"-4"

FLEXIBLE METAL CONDUIT SQUEZZE CONNECTOR WITH INSULATED THROAT - ZINC DIE CAST





APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
82059-A	3/8"	50	500	1.206	0.572	1.141
82060-A	1/2"	25	250	1.497	0.552	1.370
82061-A	3/4"	25	250	1.635	0.536	1.574
82062-A	1"	10	100	1.820	0.631	1.866
82063-A	1-1/4"	10	100	1.954	0.667	2.145
82064-A	1-1/2"	5	50	2.934	0.690	2.519
82065-A	2"	10	40	2.167	0.686	3.011
82066-A	2-1/2"	-	10	2.954	0.966	3.866
82067-A	3"	-	10	0.336	0.966	4.354
82068-A	3-1/2"	-	1	3.940	1.002	4.788
82069-A	4"	-	1	4.155	1.002	5.303

c UL us
E315258
3/8"-3/4"

E315256
1"-4"

DUPLEX CONNECTORS - ZINC DIE CAST






APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
84001	3/8"	50	500	1.591	1.622	0.457

c UL us
E315258

DUPLEX CONNECTORS - ONE SCREW - ZINC DIE CAST





APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
84002	3/8"	25	250	1.402	1.323	0.472

c UL us
E315258


FLEX CONNECTORS - SCREW IN - ZINC DIE CAST

APPLICATION: Used to terminate steel or aluminum flexible metal conduit to an enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
83013	3/8"	50	500	1.303	0.906
83014	1/2"	50	500	1.366	0.913
83015	3/4"	50	500	1.614	1.126
83016	1"	25	250	1.925	1.366
83017	1-1/4"	10	100	2.142	1.744
83018	1-1/2"	10	40	2.413	2.098
83019	2"	10	40	2.559	2.650






FLEX CONNECTORS - SCREW IN - WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used to terminate steel or aluminum flexible metal conduit to an enclosure.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
83013-A	3/8"	50	500	1.363	0.906
83014-A	1/2"	50	500	1.426	0.913
83015-A	3/4"	50	500	1.674	1.126
83016-A	1"	25	250	1.985	1.366
83017-A	1 1/4"	10	100	2.222	1.744
83018-A	1 1/2"	10	40	2.493	2.098
83019-A	2"	10	40	2.639	2.650






FLEX COUPLING - SCREW IN - ZINC DIE CAST

APPLICATION: Used to connect two lengths of steel or aluminum flexible metal conduit.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
83031	1/2"	25	250	1.811	0.906	0.540
83032	3/4"	25	250	2.051	1.197	0.738
83033	1"	25	250	2.413	1.350	0.920
83034	1 1/4"	30	120	2.756	1.752	1.169
83035	1 1/2"	25	100	3.094	2.106	1.400
83036	2"	10	40	3.276	2.657	1.885






COMBINATION COUPLINGS - EMT TO FLEX - COMPRESSION TO SCREW - IN TYPE - ZINC DIE CAST

APPLICATION: Used to terminate steel or aluminum flexible metal conduit to EMT conduit.

c UL us
E315256

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
85901	1/2"	50	500	1.681	0.976	0.630
85902	3/4"	25	250	1.795	1.224	0.818
85903	1"	10	100	2.190	1.514	1.000






FLEXIBLE METAL CONDUIT 90° SQUEEZE CONNECTOR - ZINC DIE CAST

APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure to form a 90° bend.






CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B(MIN)	B(MAX)	C
84022	3/8"	50	500	1.752	0.430	0.720	0.350
84023	1/2"	25	250	2.122	0.640	1.030	0.350
84024	3/4"	10	100	2.346	0.760	1.150	0.440
84025	1"	5	50	2.786	1.090	1.730	0.543
84026	1-1/4"	10	40	3.890	1.340	1.970	0.594
84027	1-1/2"	-	5	6.008	1.650	2.610	0.689
84028	2"	-	5	6.008	1.540	2.540	0.701
84029	2-1/2"	-	5	6.795	2.450	2.980	0.843
84030	3"	-	2	7.886	2.930	3.450	0.827
84031	3-1/2"	-	-	9.400	3.280	3.950	0.941
84032	4"	-	1	9.783	3.680	4.430	0.941

c UL us
E315258
3/8"-3/4"
E315256
1"-4"

FLEXIBLE METAL CONDUIT 90° SQUEEZE CONNECTOR - WITH INSULATED THROAT - ZINC DIE CAST

APPLICATION: Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure to form a 90° bend.





CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B(MIN)	B(MAX)	C
84022-A	3/8"	50	500	1.811	0.430	0.720	0.409
84023-A	1/2"	25	250	2.181	0.640	1.030	0.409
84024-A	3/4"	10	100	2.405	0.760	1.150	0.499
84025-A	1"	5	50	2.827	1.090	1.730	0.602
84026-A	1-1/4"	10	40	2.848	1.340	1.970	0.674
84027-A	1-1/2"	-	5	6.088	1.650	2.610	0.769
84028-A	2"	-	5	6.088	1.540	2.540	0.781
84029-A	2-1/2"	-	5	6.875	2.450	2.980	0.923
84030-A	3"	-	2	7.966	2.930	3.450	0.907
84031-A	3-1/2"	-	-	9.480	3.280	3.950	1.021
84032-A	4"	-	1	9.863	3.680	4.430	1.021

c UL us
E315258
3/8"-3/4"
E315256
1"-4"

GALVANIZED STEEL CONDUIT

APPLICATION: For use as an electrical raceway in close quarters requiring extra flexibility.

E508470

CATALOG NUMBER	TRADE SIZE	INTERNAL DIAMETER Min/Max(MM)	EXTERNAL DIAMETER Min/Max(MM)
98401	3/8"	9.52/9.96	14.2/15.49
98402	1/2"	15.88/16.38	21.84/23.37
98403	3/4"	20.62/21.21	26.54/28.07
98404	1"	25.4/26.42	33.02/35.05
98405	1 - 1/4"	31.75/33.02	39.37/41.4
98406	1 - 1/2"	38.1/40.01	46.99/49.53
98407	2"	50.8/52.83	59.69/62.23
98408	2 - 1/2"	63.5/-	72.64/77.72
98409	3"	76.2/-	85.34/90.42
98410	3 - 1/2"	88.9/-	98.04/103.12
98411	4"	101.6/-	110.74/115.8



FLEXIBLE CONDUIT - ALUMINUM

APPLICATION: For use as an electrical raceway in close quarters requiring extra flexibility.

E508470

CATALOG NUMBER	TRADE SIZE	INTERNAL DIAMETER Min/Max(MM)	EXTERNAL DIAMETER Min/Max(MM)
98501	3/8"	9.52/9.98	14.22/15.49
98502	1/2"	15.87/16.38	21.84/23.36
98503	3/4"	21.62/21.20	26.54/28.06
98504	1"	25.4/26.4	33.02/35.05
98505	1 - 1/4"	31.75/33.02	39.37/41.40
98506	1 - 1/2"	38.10/40.0	46.99/49.53
98507	2"	50.8/52.83	59.69/62.23
98508	2 - 1/2"	63.5/-	72.64/77.72
98509	3"	76.2/-	85.34/90.42
98510	3 - 1/2"	88.9/-	98.04/103.12
98511	4"	101.6/-	110.74/115.84



PVC COATED FLEXIBLE STEEL CONDUIT

APPLICATION: For use as an electrical raceway in close quarters requiring extra flexibility.


CATALOG NUMBER	TRADE SIZE	OUTSIDE (MM)	THICKNESS (MM)
98601	3/8"	-	0.21
98602	1/2"	-	0.22
98603	3/4"	-	0.23
98604	1"	-	0.26
98605	1 - 1/4"	-	0.33
98606	1 - 1/2"	-	0.33
98607	2"	-	0.36
98608	2 - 1/2"	-	0.5
98609	3"	-	0.5
98610	3 - 1/2"	-	0.55
98611	4"	-	0.55





CABLE CONNECTORS STEEL CLAMP - ZINC DIE CAST






APPLICATION: Used to terminate NM sheathed cable, flexible cord or SE cable to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88019	3/8"(1/2" KO)	100	1000	0.783	0.354
88024	3/4"	50	500	0.925	0.409
88025	1"	25	250	1.086	0.503
88026	1 1/4"	10	100	1.251	0.598
88027	1 1/2"	10	100	1.440	0.606
88028	2"	5	50	1.577	0.769

c UL us
E315257

CABLE CONNECTORS - STEEL






APPLICATION: Used to terminate NM sheathed cable, flexible cord or SE cable to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88019-S	3/8"	100	1000	0.980	0.413

c UL us
E315257

CLAMP - COMBINATION CONNECTORS - SNAP IN - ZINC DIE CAST






APPLICATION: Used to terminate NM sheathed cable, flexible cord or SE cable to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A(MIN)	A(MAX)	B
88019-NB	1/2"	100	1000	0.180	0.640	1.180
88024-NB	3/4"	50	500	0.300	0.830	1.600

c UL us
E315257

CABLE CONNECTORS - ZINC CLAMP - ZINC DIE CAST





APPLICATION: Used to terminate NM sheathed cable, flexible cord or SE cable to enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88031	3/4"	50	500	0.920	0.415
88032	1"	25	250	1.140	0.537
88033	1 1/4"	10	100	1.322	0.586
88034	1 1/2"	10	100	1.296	0.566
88035	2"	5	50	1.591	0.723

c UL us
E315257

SNAP IN CONNECTORS - ZINC DIE CAST


APPLICATION: Used to terminate NM sheathed cable, flexible cord or SE cable to enclosure.

Patent

c UL us
E315257

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88019-YNB	3/8"	100	1000	0.86	1.18
88024-YNB	3/4"	50	500	0.925	1.65






CABLE CONNECTORS - ZINC DIE CAST

APPLICATION: Used to terminate armored or metal clad cable to an enclosure.

c UL us
E315258

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
88003	3/8"	100	1000	0.783	0.354






SET SCREW BX CONNECTORS - ZINC DIE CAST

APPLICATION: Used to terminate armored or metal clad cable to an enclosure.

c UL us
E315258

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
88201	3/8"	100	1000	0.780	0.877	0.386






SNAP IN BUSHINGS - NYLON

APPLICATION: Use to protect non-metallic cable from damage when running cable through metal studs. Indoors only.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
31101	1/2"	-	1000	0.953	0.449
31102	3/4"	-	1000	1.220	0.449
31103	1"	-	1000	1.469	0.449
31104	1 1/4"	-	-	1.823	0.689
31105	1 1/2"	-	-	2.106	0.689
31106	2"	-	-	2.650	0.748
31107	2 1/2"	-	150	3.205	0.685








PLASTIC CABLE CONNECTORS - POLYPROPYLENE






APPLICATION: Used to connect non-metallic sheathed cable to a steel outlet box or other metal enclosure. Snap-in design. Dry location.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
31201	3/8"(1/2"KO)	-	500	1.031	0.375	0.965
31202	1/2"	-	500	1.340	0.475	1.125
31203	3/4"	-	500	1.510	0.475	1.200
31204	1"	-	500	1.637	0.475	1.500
31205	1 1/4"	-	500	2.085	0.475	2.012

c UL us
E315257

PUSH - IN CABLE CONNECTORS - NYLON





APPLICATION: Used to connect non-metallic sheathed cable to a steel outlet box or other metal enclosure. Quick, easy two-step installation. Snap-in style. No screws or locknuts required. Dry location.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
31301	3/8"(1/2"KO)	-	-	1.010	0.450	0.096
31302	3/4"	-	-	1.293	0.597	0.096
31303	1"	-	-	1.648	0.683	0.156

c UL us
E315257


SNAP - IN FITTING - POLUPHENYLENE ETHER



APPLICATION: For use with non-metallic sheathed cable to box or enclosure.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
31401	1/2"	-	-	2.54	0.375	0.938
31402	3/4"	-	-	1.312	0.625	2.54

c UL us
E315257




UNIVERSAL SNAP IN BUSHINGS - POLYPROPYLENE



APPLICATION: Use to protect non-metallic cable from damage when running cable through metal studs. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
31111	Universal	-	250	0.980	2.263	0.571

c UL us
E358603



PLASTIC INSULATING BUSHINGS - POLYPROPYLENE


APPLICATION: Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box.Indoor or outdoor use.

c UL us
E315256
1/2"-4"

E358603
3 1/2",5",6"

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
33001	1/2"	100	1000	1.051	0.362
33002	3/4"	100	1000	1.283	0.386
33003	1"	50	500	1.618	0.480
33004	1 1/4"	25	250	1.902	0.567
33005	1 1/2"	25	250	2.295	0.476
33006	2"	25	100	2.630	0.531
33007	2 1/2"	10	100	3.236	0.614
33008	3"	10	100	3.911	0.677
33009	3 1/2"	-	20	4.307	0.709
33010	4"	-	20	4.810	0.722
33011	5"	-	10	6.250	1.000
33012	6"	-	10	7.500	1.000






ANTI SHORT BUSHINGS - POLYPROPYLENE

APPLICATION: Insert one bushing at each end of conduit to protect wire.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	PER BAG	L×W×H	
			A	B
37001	5/16"	50	0.394	0.350
37002	3/8"	50	0.450	0.410
37003	7/16"	50	0.588	0.540
37004	1/2"	25	0.780	0.730
37005	3/4"	20	0.990	0.940
37006	1"	20	1.448	1.106
37007	1 1/4"	20	1.732	1.417
37008	1 1/2"	20	2.110	1.787
37009	2"	20	2.574	2.043






EMT INSULATING BUSHINGS - POLYPROPYLENE

APPLICATION: Protects cables in communications and security systems against abrasion from edge of EMT.

c UL us
E358603


CATALOG NUMBER	TRADE SIZE	COLOR	INNER CARTON	MASTER CARTON	L×W×H	
					A	B
38001	1/2"	GRAY/BLACK	100	1000	0.522	0.570
38002	3/4"	GRAY/BLACK	100	1000	0.538	0.764
38003	1"	GRAY/BLACK	50	500	0.614	0.954
38004	1 1/4"	GRAY/BLACK	25	250	0.620	1.260
38005	1 1/2"	GRAY/BLACK	25	250	0.620	1.440
38006	2"	GRAY/BLACK	20	200	0.619	1.860
38007	2 1/2"	GRAY/BLACK	-	25	1.120	2.340
38008	3"	GRAY/BLACK	-	25	1.190	2.780
38009	3 1/2"	GRAY/BLACK	-	25	1.220	3.270
38010	4"	GRAY/BLACK	-	25	1.220	3.710







MIDEGET ONE HOLE STRAPS - STEEL




APPLICATION: Use to secure bare solid copper wire to a working surface. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
61201	3/16" OD	2000	20000	0.700	0.315
61202	1/4" OD	700	7000	0.992	0.504

c UL us E331642

BX ONE HOLE STRAPS - STEEL




APPLICATION: Used to secure AC / MC cable range of .475 to .580 to a wood, masonry or similar surface. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
64102	3/8"	500	5000	1.230	0.510

c UL us E331642

ONE HOLE SEU STRAPS - STEEL




APPLICATION: Use to secure service entrance cable to a wood, masonry or similar surface. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62701	14/2-12/2	100	1000	1.693	0.567	0.500
62702	8/3-4/3	100	1000	1.941	0.567	0.587
62703	3/3-2/3	100	1000	2.555	1.000	0.894
62704	1-2/0	25	250	2.850	1.024	0.980
62705	3/0-4/0	25	250	2.835	0.984	0.984

c UL us E331642

TWO HOLES SEU STRAPS - STEEL




APPLICATION: Use to secure service entrance cable (SEU, SER) to a wood, masonry or similar surface. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62721	8/3-4/3	100	1000	2.378	0.748	0.445
62722	3/3-2/3	100	1000	2.720	0.748	0.610
62723	1-2/0	25	250	3.220	0.752	0.752
62724	3/0-4/0	25	250	3.476	0.756	0.917

c UL us E331642

ROMEX AND SEU STRAPS - HEAVY GUAGE STEEL



APPLICATION: Use to secure service entrance cable to a wood, masonry or similar surface. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
62804	14/2 - 12/2	500	5000	1.130	0.504	0.256


c UL us E331642

WEDGE CLAMP CONNECTORS - ALUMINUM

APPLICATION: Supports power cables and other conductors when attached to buildings or utility poles.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
73101	6-2	-	20	3	6.07	5.45
73102	4-1/0	-	20	3.75	7.26	5.45
73103	2/0-4/0	-	20	3.75	7.28	5.45





ADJUSTABLE PORCELAIN WIREHOLDER - PORCELAIN

APPLICATION: Protects sheathing and ensures performance.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
00106	1 1/4" - 3	-	-	2.11	2.9	3.8






PORCELAIN WIREHOLDERS - PORCELAIN

APPLICATION: Secure wires before their entry into a mast or SE cap.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
00101	Light Duty: 1 11/16"	-	-	1.37	1.98	1.62
00102	Medium Duty: 2 1/4"	-	-	1.9	2.9	1.85
00103	Heavy Duty: 2 1/4"	-	-	2.11	2.9	3.0
00104	With Pipe Hanger: 2"	-	-	2.11	2.9	2.38
00105	With Pipe Hanger: 2 1/2"	-	-	-	-	-






SERVICE CABLE SILL PLATES - ALUMINUM / ZINC

APPLICATION: Used in conjunction with sealing compound to protect service entrance cable and cover the hole where it enters the building.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H			
				A	B	C	D
73001	3#4	-	-	-	-	-	-
73002	3#1/0 - 2/0	-	-	0.875	1.2	2.75	2.965
73003	3#3/0 - 4/0	-	-	2.475	1.850	6.250	3.725





THREE PIECE K.O.SEALS






APPLICATION: Use to cover exposed knockout holes in steel outlet boxes and other metal enclosures. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
62321	1/2"	50	500	1.190
62322	3/4"	50	500	1.394
62323	1"	50	500	1.654
62324	1 1/4"	10	100	2.070
62325	1 1/2"	10	100	2.457
62326	2"	10	100	2.937
62327	2 1/2"	5	50	3.752
62328	3"	5	50	4.508
62329	3 1/2"	5	50	5.016
62330	4"	5	50	5.413
62331	5"	2	20	6.690
62332	6"	2	20	7.840

c UL us
E358603

KNOCK - OUT SEALS - STEEL






APPLICATION: Use to cover exposed knockout holes in steel outlet boxes and other metal enclosures. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
63001	1/2"	100	1000	1.079	0.315
63002	3/4"	50	500	1.250	0.313
63003	1"	50	500	1.500	0.344
63004	1 1/4"	50	500	1.898	0.346
63005	1 1/2"	30	300	2.219	0.359
63006	2"	20	200	2.688	0.375

c UL us
E358603

NAIL PLATES - STEEL





APPLICATION: Use to protect internal wire runs from nail punctures. Indoors only.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65501	1 1/2" x 2 1/2"	50	500	2.500	1.500
65502	1 1/2" x 5"	-	100	5.000	1.500
65503	1 1/2" x 6"	-	50	6.000	1.500
65504	1 1/2" - 2 1/2"	-	25	2.500	1.500

c UL us
E331642


REDUCING WASHERS-STEEL

APPLICATION: Use to reduce the size of the knockout in a steel outlet box or other metal enclosure. Must use one inside the enclosure opening and one on the outside. Indoors or outdoors.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
61001	3/4" - 1/2"	100	1000	1.437	0.866
61002	1" - 1/2"	100	1000	1.744	0.866
61003	1" - 3/4"	100	1000	1.744	1.098
61004	1 1/4" - 1/2"	100	1000	2.193	0.866
61005	1 1/4" - 3/4"	100	1000	2.193	1.098
61006	1 1/4" - 1"	100	1000	2.193	1.366
61007	1 1/2" - 1/2"	50	500	2.445	0.874
61008	1 1/2" - 3/4"	50	500	2.445	1.106
61009	1 1/2"-1"	50	500	2.445	1.366
61010	1 1/2" - 1 1/4"	50	500	2.445	1.728
61011	2" - 1/2"	100	1000	3.008	0.874
61012	2" - 3/4"	100	1000	3.008	1.106
61013	2" - 1"	100	1000	3.008	1.366
61014	2" - 1 1/4"	100	1000	3.008	1.728
61015	2" - 1 1/2"	50	500	3.008	1.976
61016	2 1/2" - 1/2"	50	500	3.504	0.874
61017	2 1/2" - 3/4"	50	500	3.504	1.106
61018	2 1/2" - 1"	50	500	3.504	1.366
61019	2 1/2" - 1 1/4"	50	500	3.504	1.728
61020	2 1/2" - 1 1/2"	50	500	3.504	1.976
61021	2 1/2"- 2"	50	500	3.504	2.460
61022	3" - 1/2"	-	100	4.490	0.870
61023	3" - 3/4"	-	100	4.490	1.060
61024	3" - 1"	-	100	4.490	1.360
61025	3" - 1 1/4"	-	100	4.490	1.750
61026	3" - 1 1/2"	-	100	4.490	1.995
61027	3" - 2"	-	100	4.490	2.400
61028	3" - 2 1/2"	-	100	4.490	2.940
61029	3 1/2" - 1/2"	-	100	5.000	0.870
61030	3 1/2" - 3/4"	-	100	5.000	1.060
61031	3 1/2" - 1"	-	100	5.000	1.380
61032	3 1/2" - 1 1/4"	-	100	5.000	1.710
61033	3 1/2" - 1 1/2"	-	100	5.000	1.980
61034	3 1/2" - 2"	-	100	5.000	2.345
61035	3 1/2" - 2 1/2"	-	100	5.000	2.920
61036	3 1/2" - 3"	-	100	5.000	3.560
61037	4" - 1/2"	-	100	5.500	0.870
61038	4" - 3/4"	-	100	5.500	1.060
61039	4" - 1"	-	100	5.500	1.380
61040	4" - 1 1/4"	-	100	5.500	1.715
61041	4"- 1 1/2"	-	100	5.500	1.970
61042	4" - 2"	-	100	5.500	2.435
61043	4"- 2 1/2"	-	100	5.500	2.920
61044	4" - 3"	-	100	5.500	3.560
61045	4" - 3 1/2"	-	100	5.500	4.050






2 - PIECE CONNECTORS - STEEL

APPLICATION: Used to secure #14 - #10 non-metallic sheathed cable to a steel outlet box or other metal enclosure. No locknut is required. Dry location.

c UL us
E315257

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
65001	3/8" - 1/2"	50	500	1.310	0.640
65002	3/4" - 1"	25	250	1.750	0.765
65003	1 1/4"	20	200	2.120	0.765
65004	1 1/2"	20	200	2.500	0.780






OVAL SERVICE ENTRANCE CABLE HOODS - PVC



APPLICATION: Required in overhead applications.


CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
31001	3#3 to 3#1	-	-	4.25	6.00	2.00
31002	3#2/0 to 3#4/0	-	-	6.00	6.187	2.50

c UL us
E523902



SERVICE ENTRANCE CABLE CONNECTOR - ZINC DIE CAST





APPLICATION: Used to connect service entrance cable to a metal enclosure or service enclosure in wet locations.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
81101	1/2"(.236 X .452)	25	250	0.220	0.440	1.200
81102	3/4"(.224 X .669)	25	250	0.220	0.660	1.270
81103	1"(.410 X .65)	5	50	0.410	0.650	1.875
81104	1"(.460 X .728)	5	50	0.460	0.715	0.875
81105	1"(.530 X .850)	5	50	0.530	0.850	1.875
81106	1-1/4"(.550 X .910)	-	50	0.550	0.910	1.937
81107	1-1/4"(.580 X .960)	-	50	0.580	0.960	1.937
81108	1-1/4"(.660X1.120)	-	50	0.660	1.120	1.937
81109	1-1/2"(.705 X 1.195)	-	50	0.705	1.195	2.375
81110	1-1/2"(.740 X 1.235)	-	50	0.740	1.235	2.375
81111	2"(.700 X 1.195)	-	10	0.890	1.540	2.250
81112	2"(.750 X 1.232)	-	10	0.750	1.195	2.250
81113	2"(.866 X1.338)	-	10	0.740	1.235	2.250
81114	2"(.875X1.440)	-	10	0.830	1.415	2.250
81115	2"(.996 X1.580)	-	10	0.995	1.580	2.250

c UL us
E315257


SERVICE ENTRANCE CAPS - WITH SPLIT INSULATORS - ALUMINUN



APPLICATION: Used with Type SEU service entrance cable.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
75001	3#3-2	5	50	2.899	2.421	2.233
75002	3#3/0 - 4/0	-	20	4.446	3.380	3.233

c UL us
E523902




SERVICE ENTRANCE CAPS - THREADED - ALUMINUM

APPLICATION: Threaded type head used with rigid conduit and IMC for pulling service drop conductors.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
70001	1/2"	30	120	2.945	2.346	1.996
70002	3/4"	20	80	3.395	2.504	2.244
70003	1"	10	40	3.855	2.972	2.523
70004	1 1/4"	8	32	4.430	3.358	2.968
70005	1 1/2"	4	16	5.620	3.972	3.456
70006	2"	2	8	7.118	5.106	4.543
70007	2 1/2"	-	1	10.633	7.142	6.141
70008	3"	-	1	10.720	7.181	6.188
70009	3 1/2"	-	1	13.634	8.799	7.900
70010	4"	-	1	13.890	8.850	7.893
70011	5"	-	1	12.280	8.770	8.250
70012	6"	-	1	12.250	9.760	8.250






SERVICE ENTRANCE CAPS - CLAMP - ALUMINUM

APPLICATION: Clamp-on type head used with rigid conduit, IMC or EMT for pulling service drop conductors.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
71001	1/2"	30	120	3.362	2.543	1.996
71002	3/4"	20	80	3.746	2..890	2.244
71003	1"	10	40	4.180	3.346	2.523
71004	1 1/4"	8	32	4.722	3.634	2.968
71005	1 1/2"	4	16	5.938	4.496	3.456
71006	2"	2	8	7.811	5.807	4.543
71007	2 1/2"	-	1	10.453	6.937	6.141
71008	3"	-	1	10.846	7.134	6.188
71009	3 1/2"	-	1	13.925	8.744	7.900
71010	4"	-	1	13.925	8.744	7.893






SERVICE ENTRANCE CAPS - SET SCREW - ALUMINUM

APPLICATION: Set screw type head used with rigid conduit, IMC or EMT for pulling service drop conductors.

c UL us
E358603

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H		
				A	B	C
72001	1/2"	30	120	2.945	2.591	1.996
72002	3/4"	20	80	3.395	2.783	2.244
72003	1"	10	40	3.855	2.972	2.523
72004	1 1/4"	8	32	4.430	3.295	2.968
72005	1 1/2"	4	16	5.620	4.110	3.456
72006	2"	2	8	7.118	5.858	4.543
72007	2 1/2"	-	1	10.633	7.027	6.141
72008	3"	-	1	10.720	7.244	6.188
72009	3 1/2"	-	1	13.634	8.720	7.900
72010	4"	-	1	13.890	8.720	7.893







ROOF FLASHINGS - STEEL

APPLICATION: Directs water flow away from riser pipe entry point.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H	
				A	B
66691	1/2" - 1"	-	10	12.44	8.72
66692	1 1/4"	-	20	12.44	8.72
66693	2"	-	20	14.500	10.750
66694	2-1/2"	-	20	14.500	10.750






BARRICADE TAPES



APPLICATION: High visibility tape designed as a hazard alert.

CATALOG NUMBER	TRADE SIZE	COLOR	MASTER CARTON
BTR150-Y	150mm*150M	YELLOW	12
BTR075-Y	75mm*150M	YELLOW	24
BTR075-R	75mm*150M	RED	24


JACK CHAIN



APPLICATION: Support chain for hanging linear and high bay fixtures.

CATALOG NUMBER	TRADE SIZE	MASTER CARTON	L×W×H	
			A	B
LT#10-200	-	200	1.228	0.531
LT#10-250	-	250	1.228	0.531
LT#10-50	-	500	1.228	0.531
LT#12-300	-	300	0.807	0.425
LT#12-50	-	500	0.807	0.425
LT#2-100	-	100	1.291	0.425
LT#3-100	-	100	1.169	0.370
LT#4-100	-	100	1.035	0.327
LT#4-250	-	250	1.035	0.327
LT#4-300	-	300	1.035	0.327

GROUND CLAMP - BRONZE

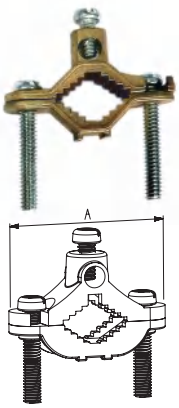


APPLICATION: Use to secure the bare copper ground wire to a 1/2” through 2” pipe. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
11001	1/2" - 1"	25	250	2.280
11003	1 1/4" - 2"	10	100	-

c UL us
E356513

GROUND CLAMP - BRONZE

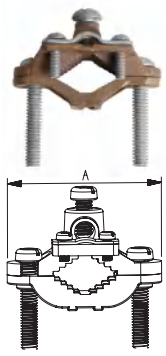

APPLICATION: Use to secure the grounding wire to a 1/2” through 1” pipe. Indoors or outdoors.

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H
				A
11301	1/2" - 1"	10	100	2.276
11302	1 1/4" - 2"	10	100	-

c UL us
E356513


GROUND CLAMP WITH HUB - BRONZE

APPLICATION: Use to connect grounding conductor in Rigid threaded conduit to a 1/2" through 1" pipe. Indoors or outdoors.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H A
11401	1/2" - 1"	10	50	2.276






GROUND CLAMP WITH STRAP - BRONZE

APPLICATION: Use to connect grounding conductor in Rigid threaded conduit to a 1/2" through 1" pipe. Indoors or outdoors.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H A
11501	1/2" - 1"	-	50	2.276
11502	1/2" - HUB	-	50	-

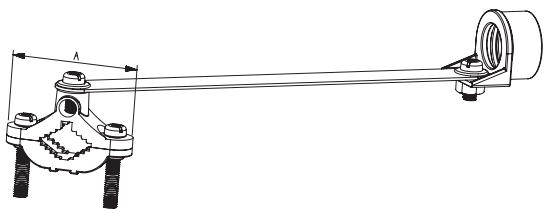




BARE WIRE GROUND CLAMPS - ZINC DIE CAST

APPLICATION: Use to secure the bare copper ground wire to a 1/2" through 1" pipe. Indoors or outdoors.

c UL us
E356513

CATALOG NUMBER	TRADE SIZE	INNER CARTON	MASTER CARTON	L×W×H A
86003	FROM 1/2"THRU 1"	25	250	2.203





Changzhou Yinlei Electronic Co.,Ltd.
Yinlei Electric (Thailand) Co.,Ltd.
http: //www.yinlei.com
E-mail: yang@yinlei.com
yyl@yinlei.com
China Add: No. 8, W. Hexiang Rd, Wujin Economic Development Zone,
Jiangsu China 213149
Tel: +86-519-88171999 86470078 89851088
Fax: +86-519-86470098 86461505
Thailand Add: 890/58 Moo 3, Khao Khan Song Sub-District,
Sriracha District, Chonburi Province 20110
Thailand Tel: +66-38-158-888 +66-38-159-888